
AV04 UVU 4000

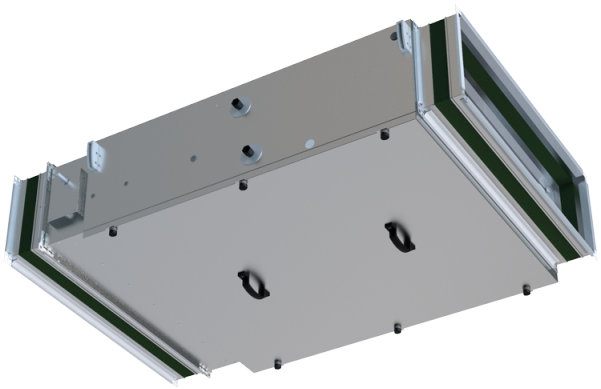

Unidirectional ventilation units

- Sound pressure level LpA at 3 m: 36
- Supply filter: COARSE 90% (ISO 16890)-G4 (EN779)
- Sound-insulated casing
- Reheater: Optional
- BMS protocol: Bacnet, ModBus
- Casing material: Aluzinc

	Unit of measurement	AV04 UVU 4000
Casing performance	-	40 mm, T3/TB4
Connected air duct size	mm	1370x420
Phases	-	1
Maximum supply voltage	V	240
Minimum supply voltage	V	200
Power supply frequency	Hz	50/60
Rated power supply fan	W	2x700
Unit current (without electric heaters)	A	6.1
Maximum airflow	m^3/h	4800
Maximum airflow at ESP 200 Pa	m^3/h	4600
Sound pressure level LpA at 3 m	dB(A)	36
Weight	kg	150
Supply filter	-	COARSE 90% (ISO 16890)-G4 (EN779)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature max	°C	60
Ambient air temperature min	°C	-40
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP54

Dimensions