
KSA 160-2E

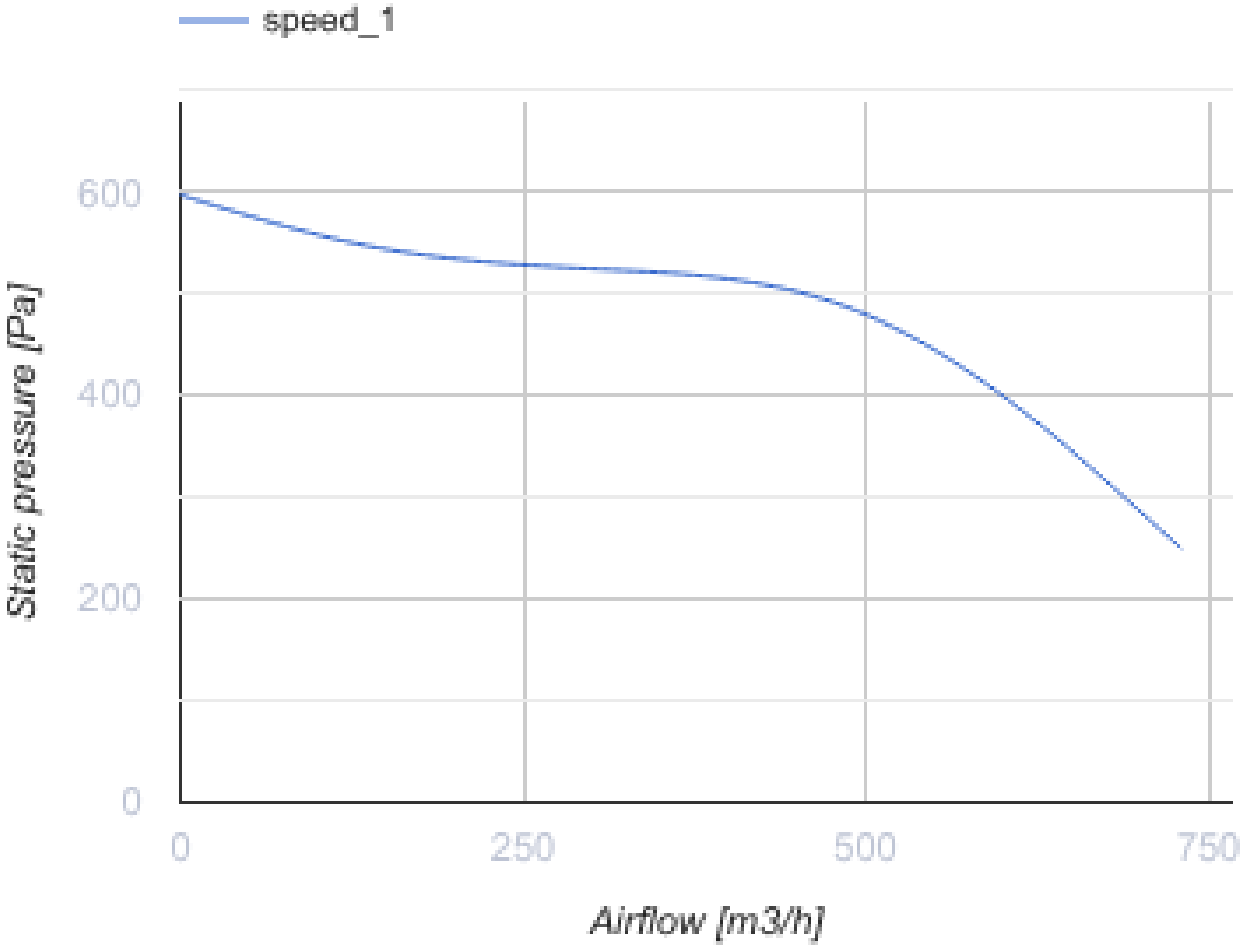


Centrifugal inline fans with forward curved blades

- Sound pressure level LpA at 3 m: 37.9
- Sound-insulated casing
- Impeller type: Centrifugal impeller with forward curved blades
- Casing material: Galvanized steel
- Installation in any position


	Unit of measurement	KSA 160-2E
Connected air duct size	mm	160
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	335
Unit current	A	1.5
Maximum airflow	m^3/h	750
Rotation speed at 50hz	-	2870
Sound pressure level LpA at 3 m	dB(A)	37.9
Weight	kg	6.28
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX2
Ingress protection rating of the drive	-	IP44
Impeller material	-	Galvanized steel


speed_1
600
400
200
0
Static pressure [Pa]
0
250
500
750
Airflow [m3/h]

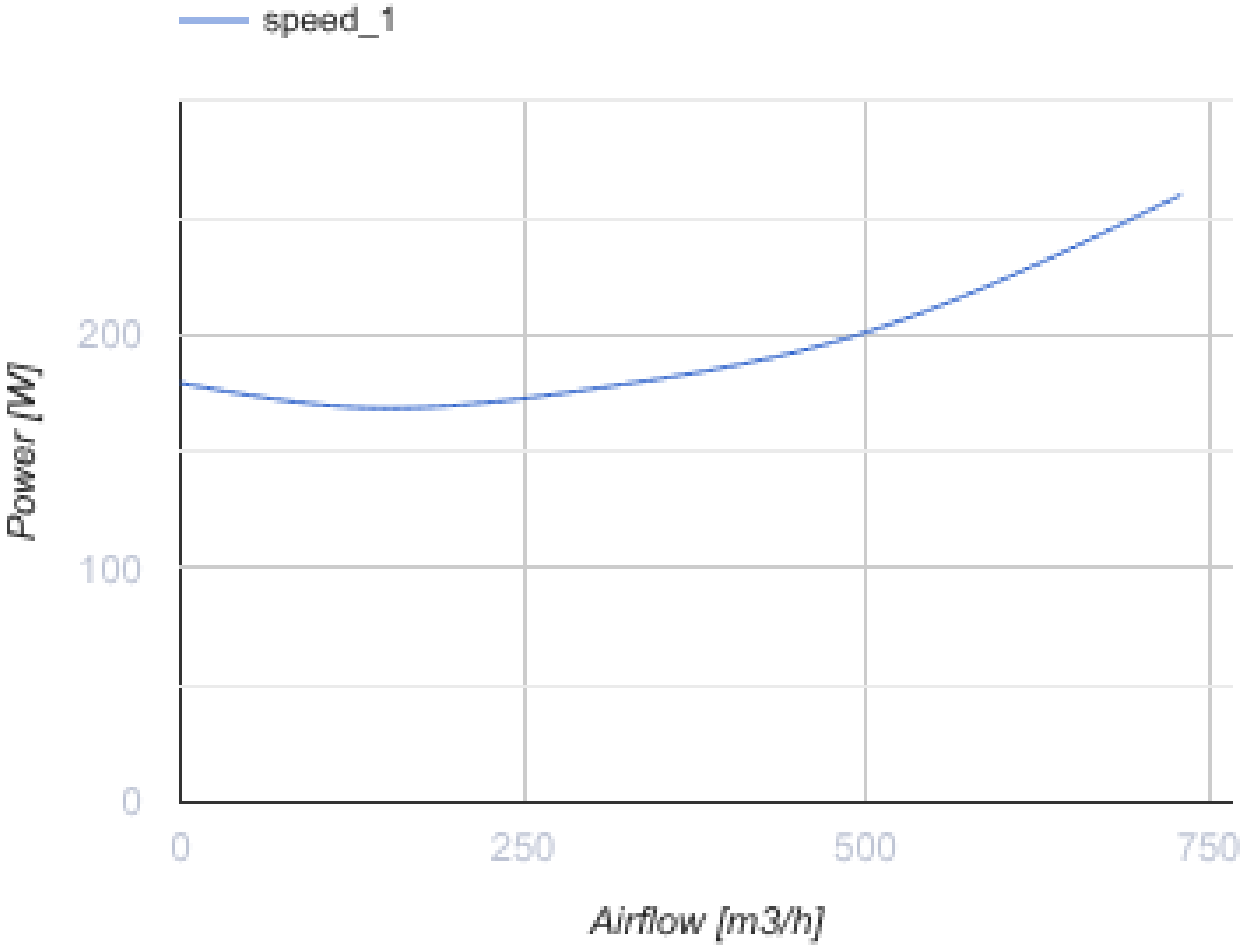

Dimensions

ØD	B	H	L	P
158	231	343	358	48

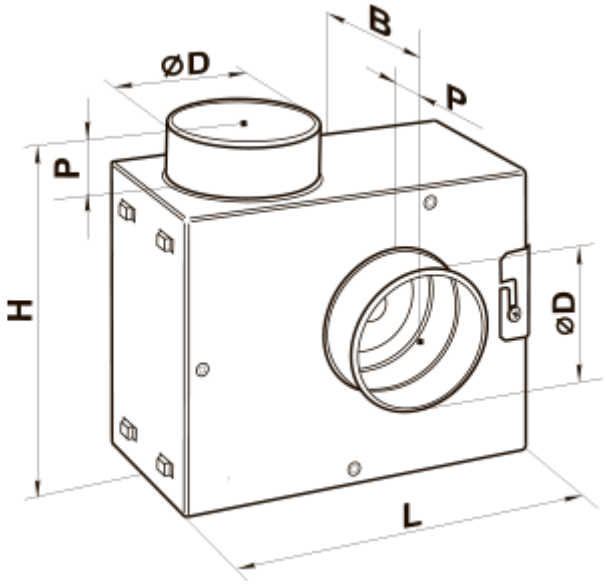
B
ØD
P
P
H
ØD
L