
KSK 400 4E

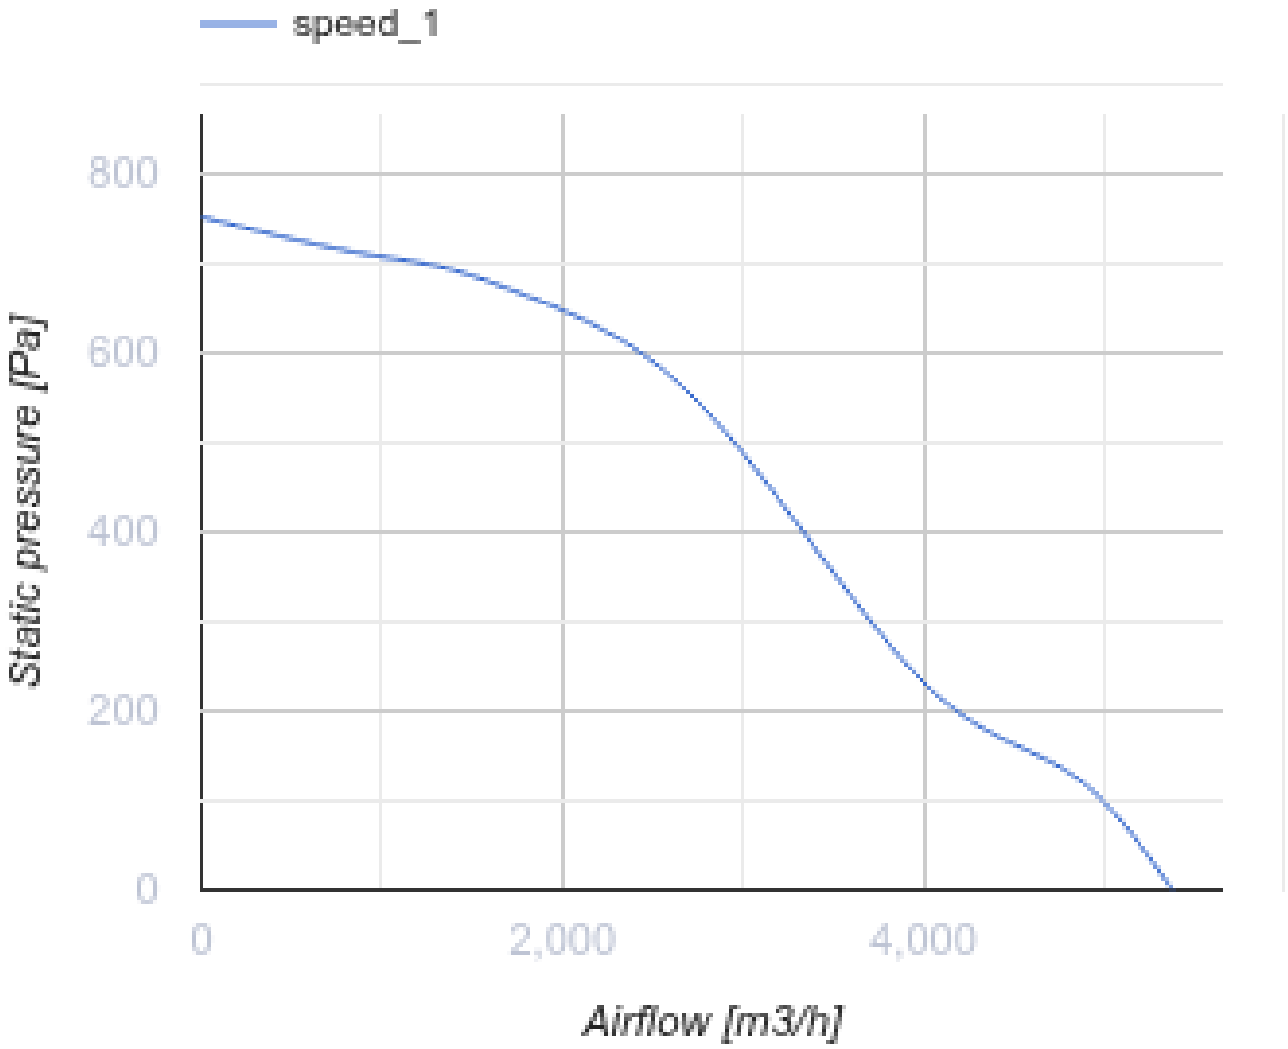


Kitchen inline fans in sound-insulated casing with operational temperature of 120 °C

• Sound pressure level LpA at 3 m: 54
• Sound-insulated casing
• Impeller type: Centrifugal impeller with backward curved blades
• Casing material: Galvanized steel


	Unit of measurement	KSK 400 4E
Connected air duct size	mm	400
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	1048
Unit current	A	5
Maximum airflow	m^3/h	5392
Rotation speed at 50hz	-	1440
Sound pressure level LpA at 3 m	dB(A)	54
Weight	kg	92
Transported air temperature (max)	°C	110
Transported air temperature (min)	°C	-20
Maximum transported air temperature	-	120°C CONTINUOUS
Ingress protection rating	-	IP54
Impeller material	-	Galvanized steel
Size	mm	400


speed_1
800
600
400
200
0
Static pressure [Pa]
0
2,000
4,000
Airflow [m3/h]

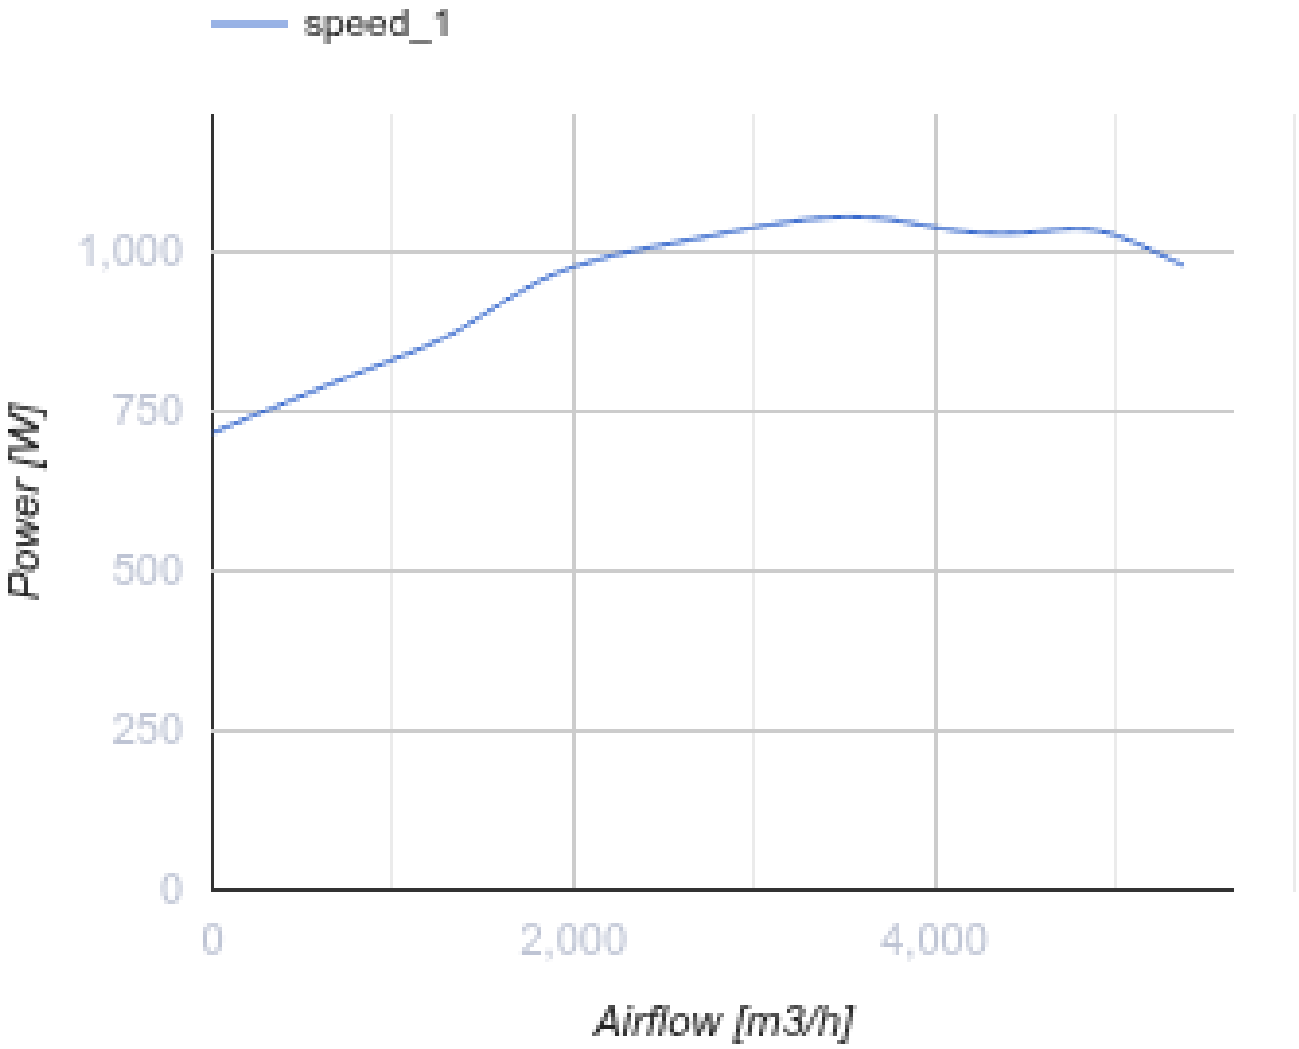


Dimensions

ØD	B	B1	H	H1	L	L1	L2	L3	L4
400	906	700	900	790	908	900	850	747	402

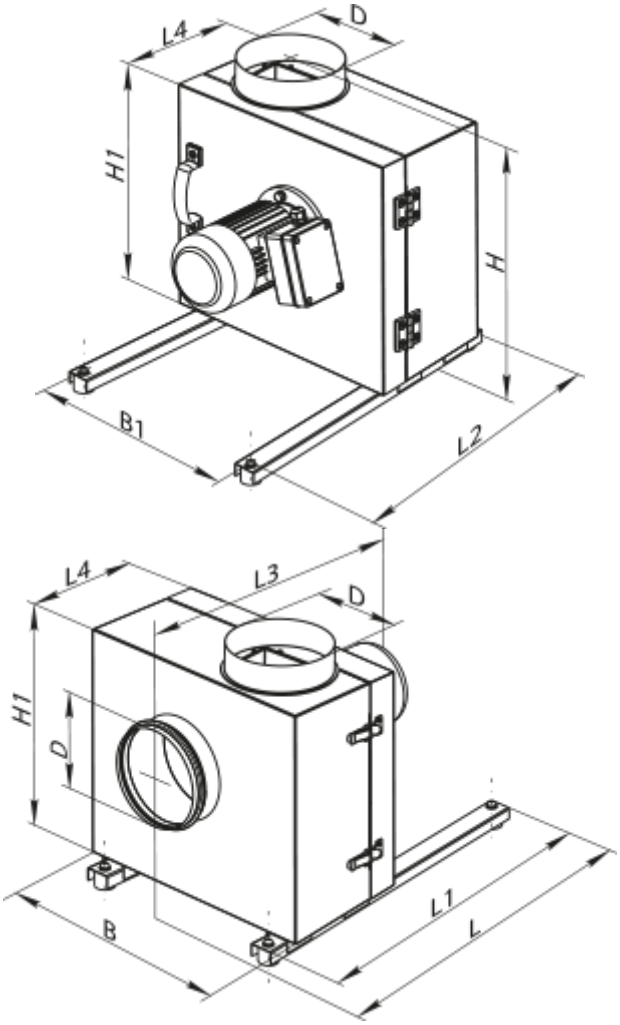

Accessories

For round ducts

Name	Photo	Description
VVG 400		Flexible anti-vibration inserts for round ducts