

MPA 1500 E-15.0 EC L A31


Air supply units in the sound- and heat-insulated casing

- Power of electrical reheater: 15000
- Sound pressure level LpA at 3 m: 46
- Sound-insulated casing
- Casing material: Aluzinc steel

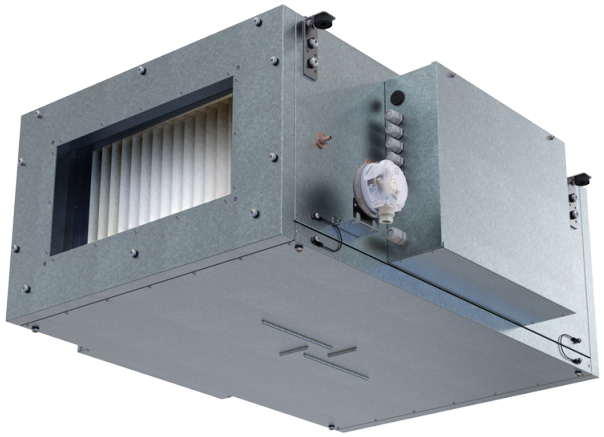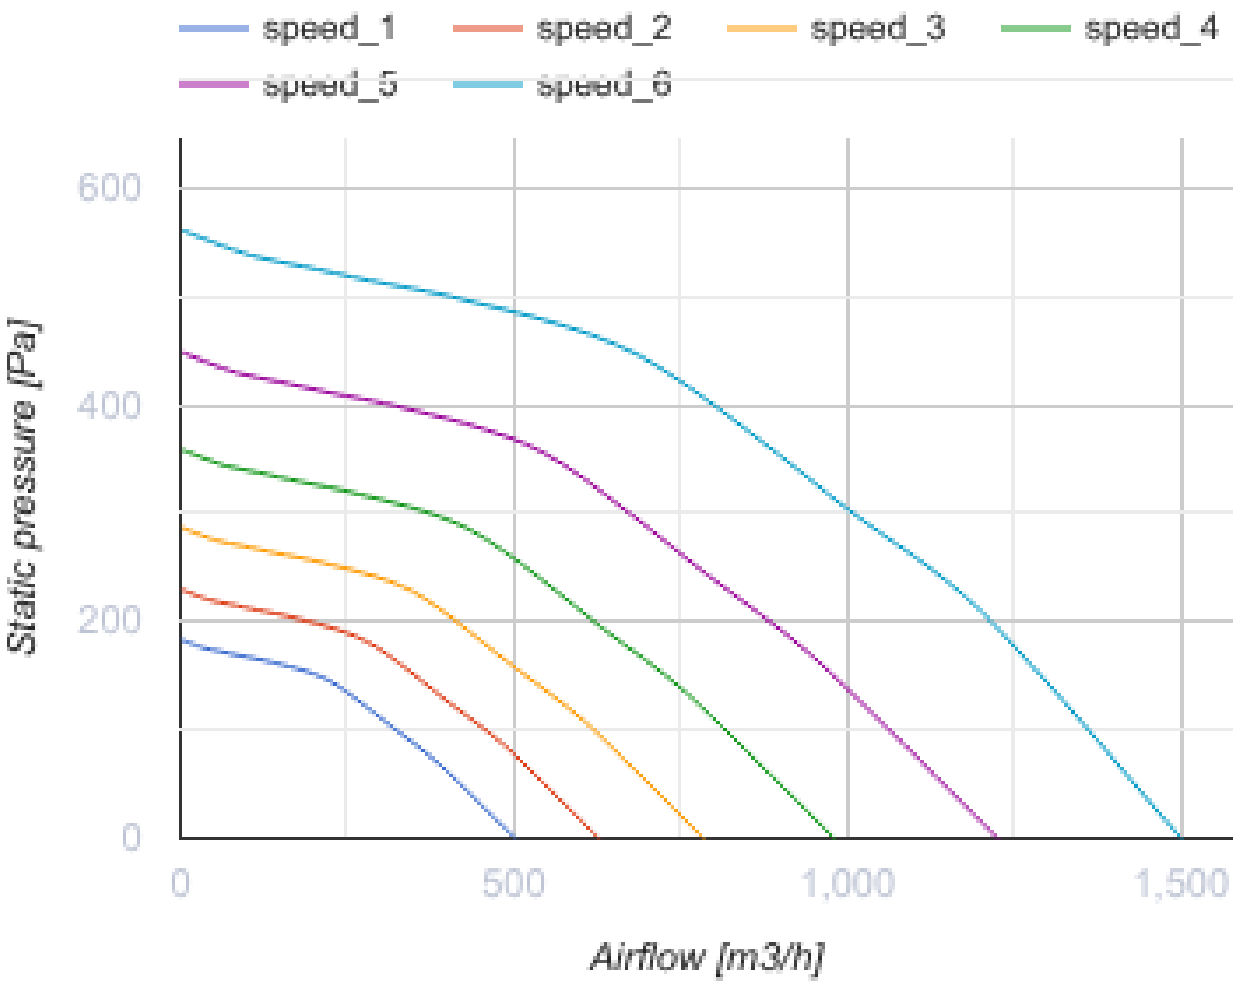


	Unit of measurement	MPA 1500 E-15.0 EC L A31
Connected air duct size	mm	500x250
Maximum supply voltage	V	400
Minimum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	223
Power of electrical reheater	W	15000
Unit current	A	22.8
Maximum airflow	m³/h	1500
Sound pressure level LpA at 3 m	dB(A)	46
Weight	kg	35
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44


speed_1
speed_2
speed_3
speed_4
speed_5
speed_6
600
400
200
0
Static pressure [Pa]
0
500
1,000
1,500
Airflow [m3/h]

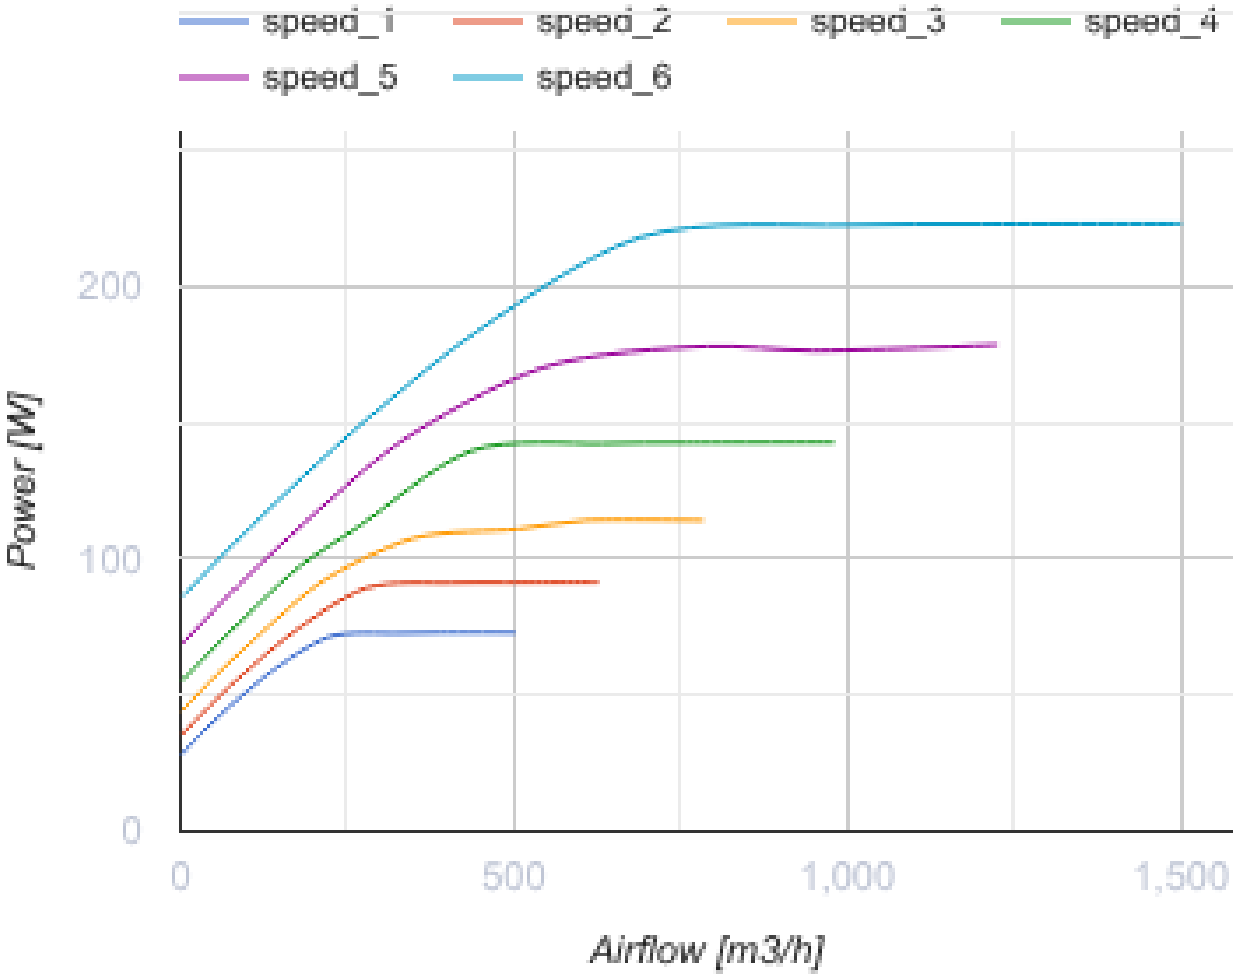

Dimensions

H	H1	L	L1	W	W1	W2	W3
440	250	900	770	700	754	847	500

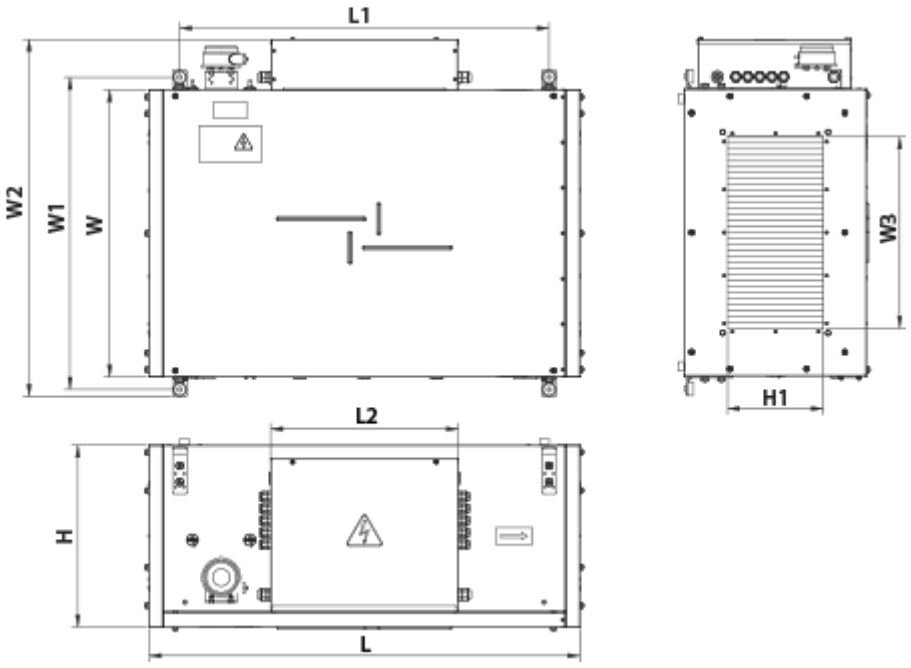
L1
W2
W1
W
W3
H1
L2
H
L