
OV 2D 300

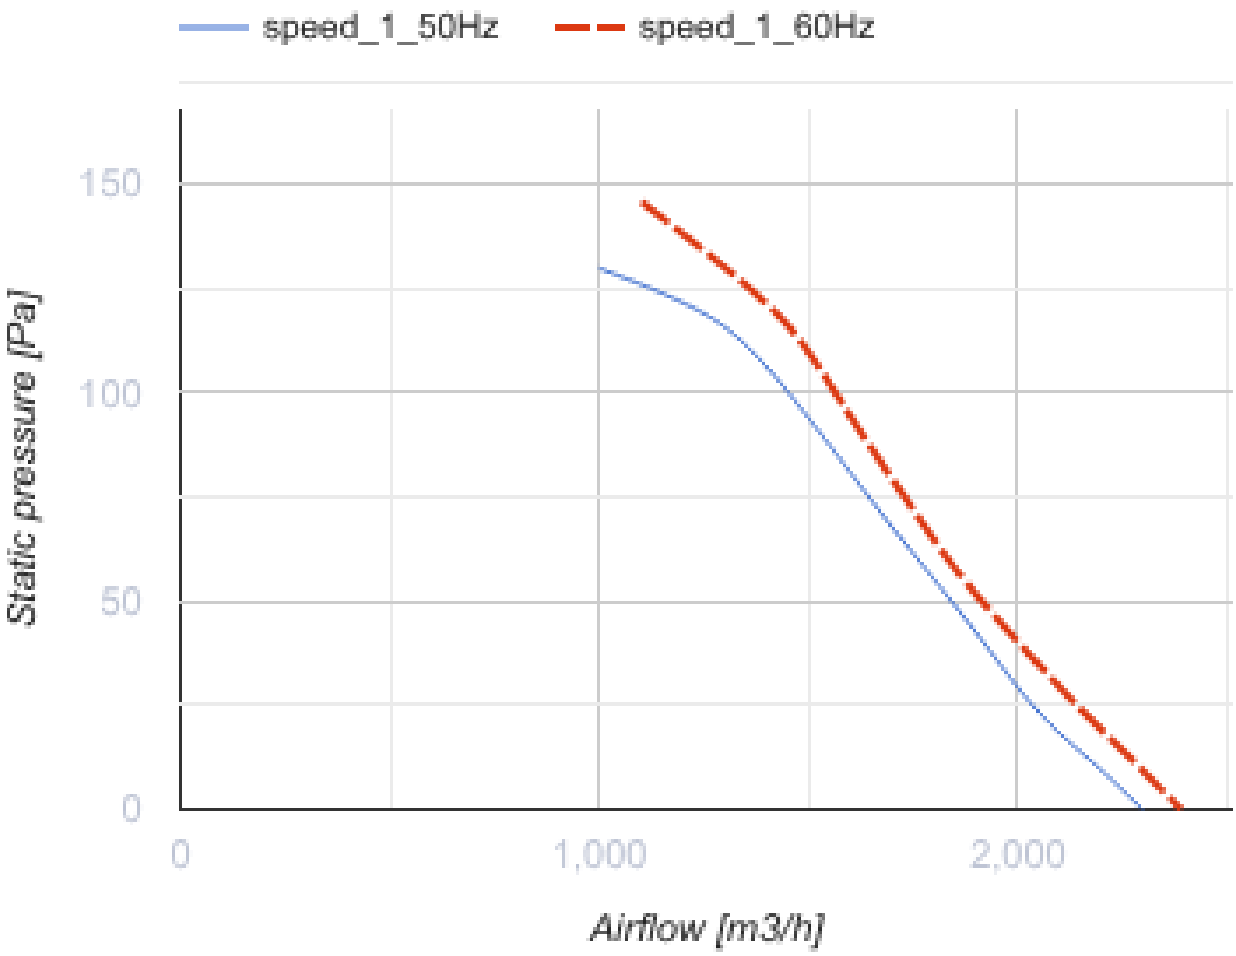


Wall-mounted axial fans

- Sound pressure level LpA at 3 m: 52
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	OV 2D 300	
Connected air duct size	mm	300	
Phases	-	3	
Minimum supply voltage	V	400	
Maximum supply voltage	V	400	
Power supply frequency	Hz	50	60
Rated power	W	145	
Unit current	A	0.25	
Maximum airflow	m³/h	2310	
Rotation speed at 50hz	-	2350	
Sound pressure level LpA at 3 m	dB(A)	52	
Weight	kg	5.4	
Transported air temperature (max)	°C	60	
Transported air temperature (min)	°C	-30	
Ingress protection rating	-	IP24	
Ingress protection rating of the drive	-	IP54	
Impeller material	-	Coated steel	


speed_1_50Hz
speed_1_60Hz
150
100
50
0
Static pressure [Pa]
0
1,000
2,000
Airflow [m3/h]

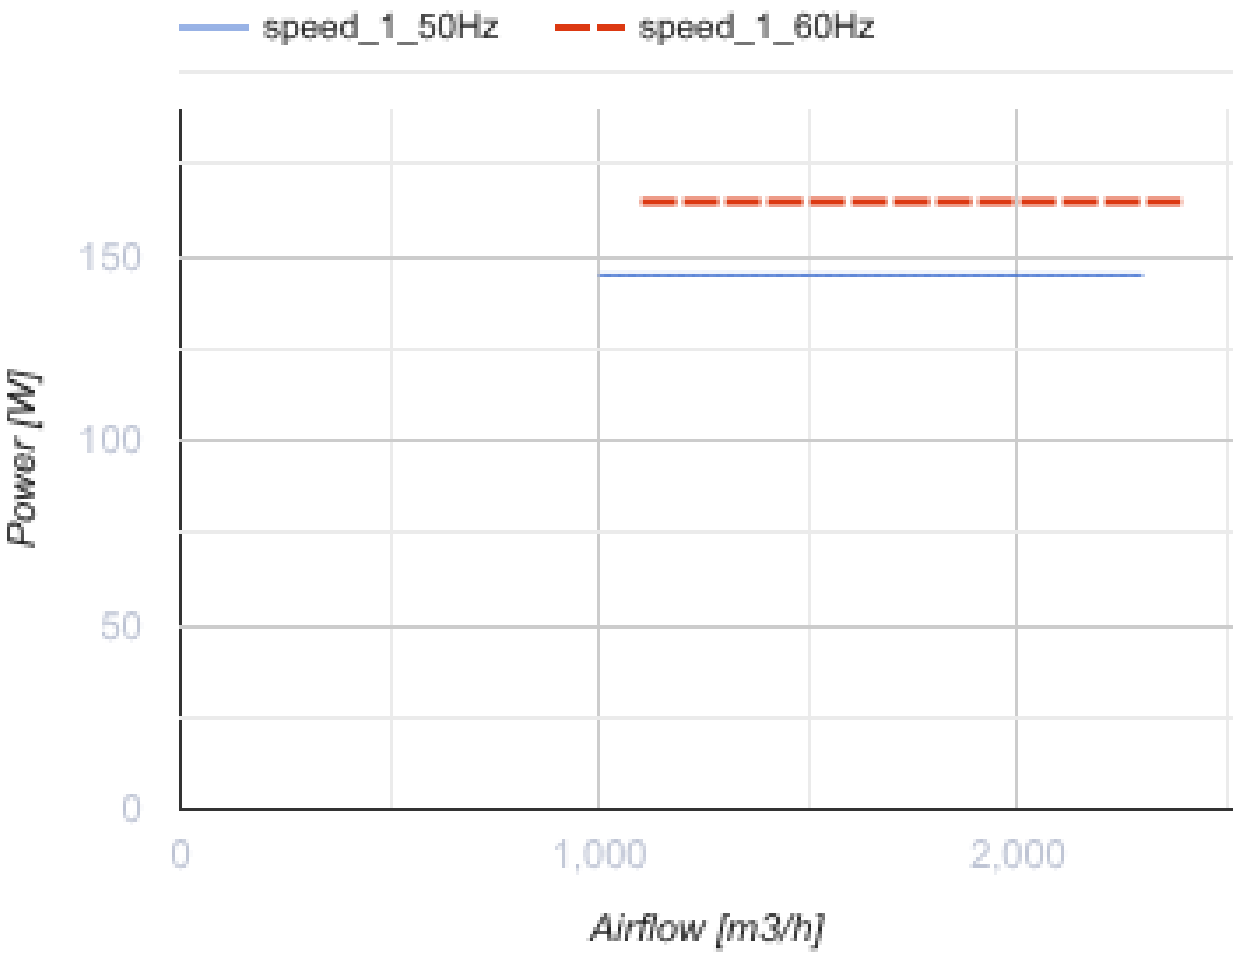

Dimensions

ØD	Ød	B	B1	L
317	9	430	380	145

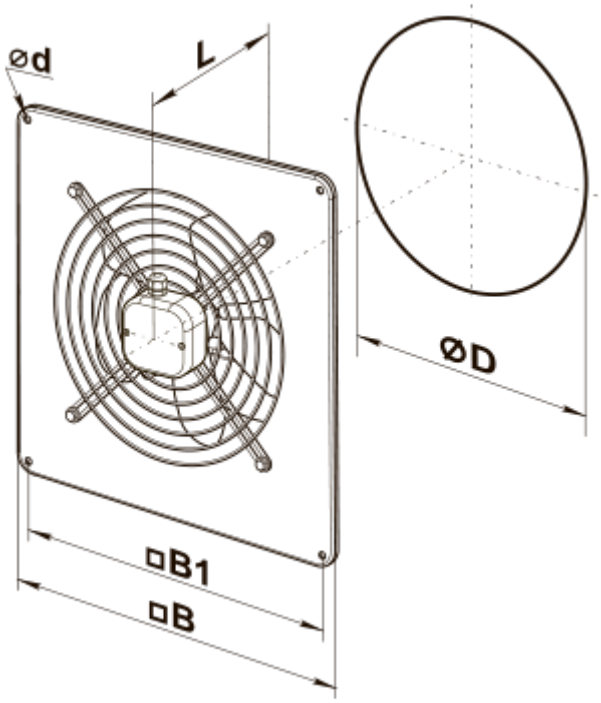
ød
L
ØD
□B1
□B

Ecodesign

Trademark	Vents
Model	OV 2D 300
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	110
Maximum external leakage rates (%)	2.7
Static efficiency (%)	30.2
Declared typology	NRVU UVU
Effective electric power input (kW)	0.141
Sound power level (dB(A))	80