
OV 2E 250

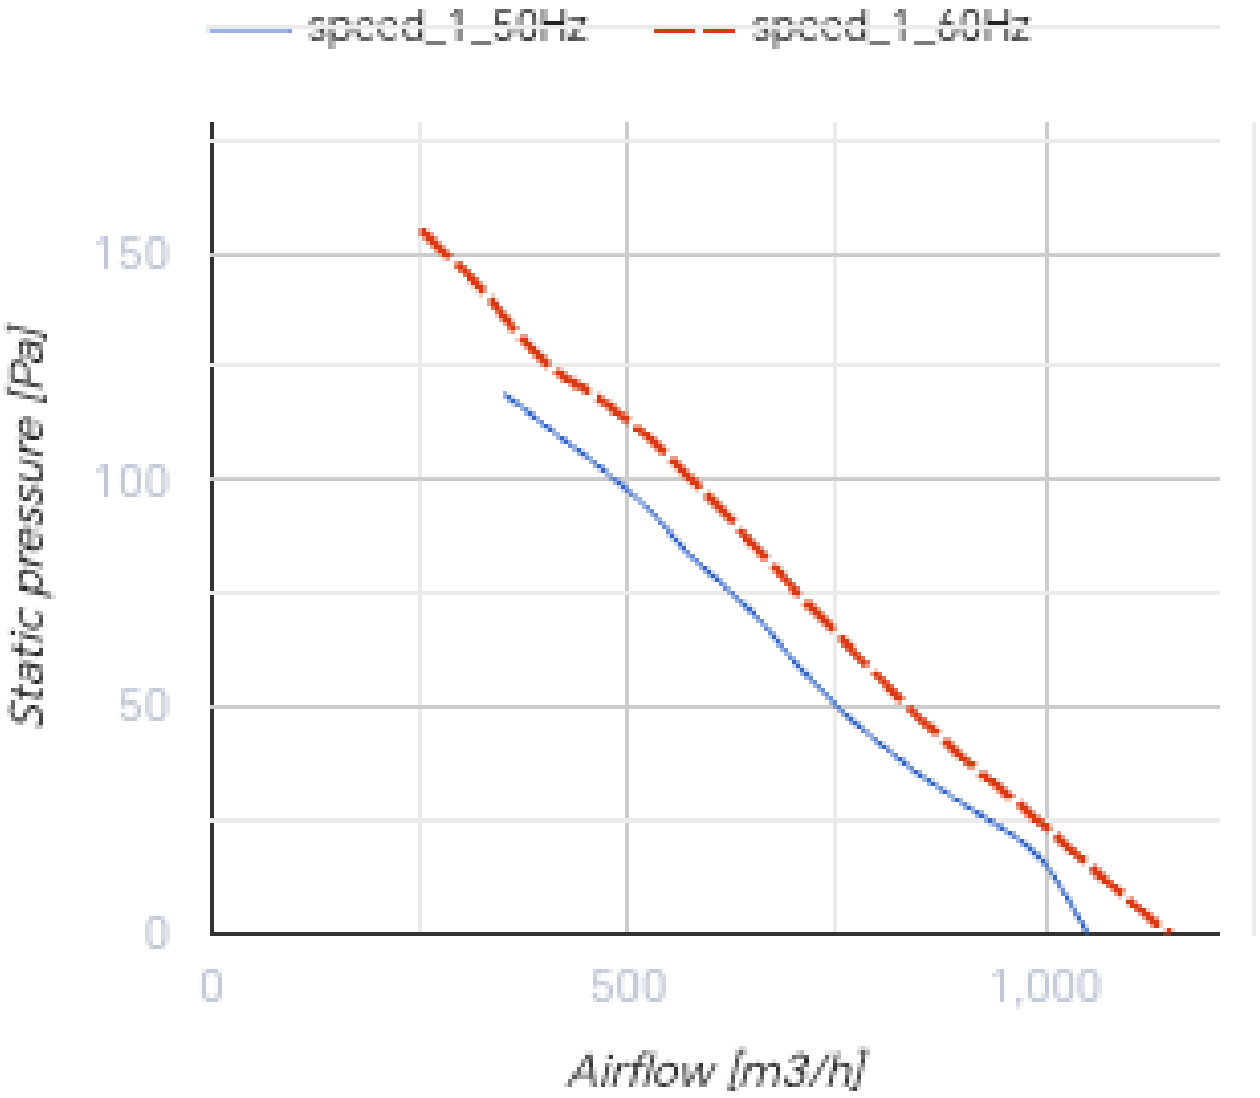


Wall-mounted axial fans

- Sound pressure level LpA at 3 m: 50
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	OV 2E 250	
Connected air duct size	mm	250	
Phases	-	1	
Minimum supply voltage	V	220	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50	60
Rated power	W	80	
Unit current	A	0.4	
Maximum airflow	m³/h	1050	
Rotation speed at 50hz	-	2400	
Sound pressure level LpA at 3 m	dB(A)	50	
Weight	kg	4	
Transported air temperature (max)	°C	60	
Transported air temperature (min)	°C	-30	
Ingress protection rating	-	IP24	
Ingress protection rating of the drive	-	IP54	
Impeller material	-	Coated steel	


speed_1_50Hz
speed_1_60Hz
150
100
50
0
Static pressure [Pa]
0
500
1,000
Airflow [m3/h]

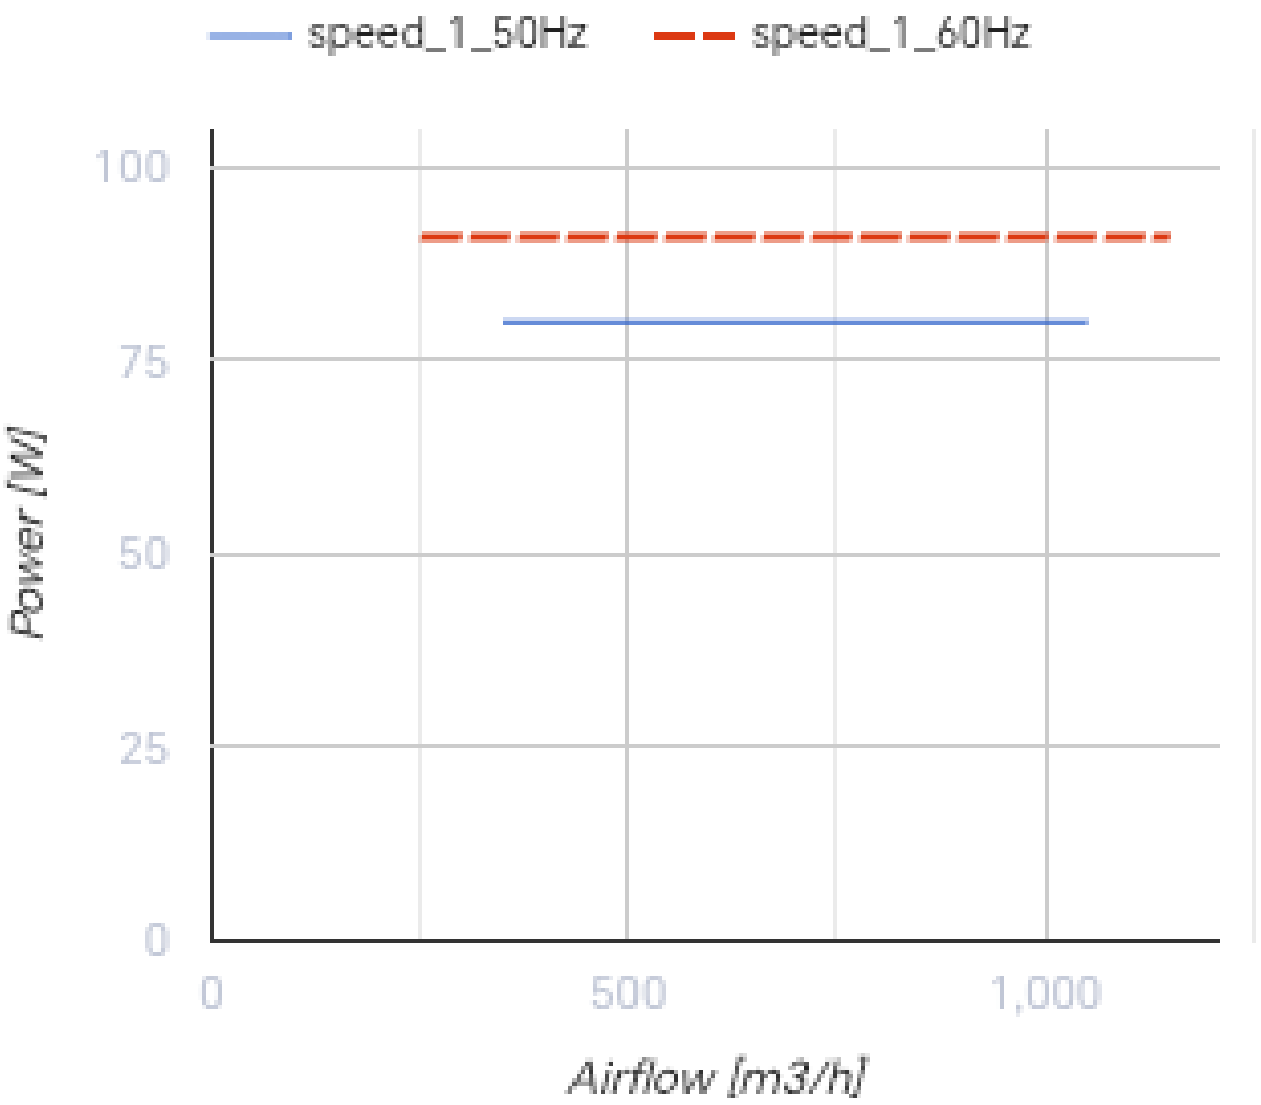

Dimensions

ØD	Ød	B	B1	L
260	7	370	320	135

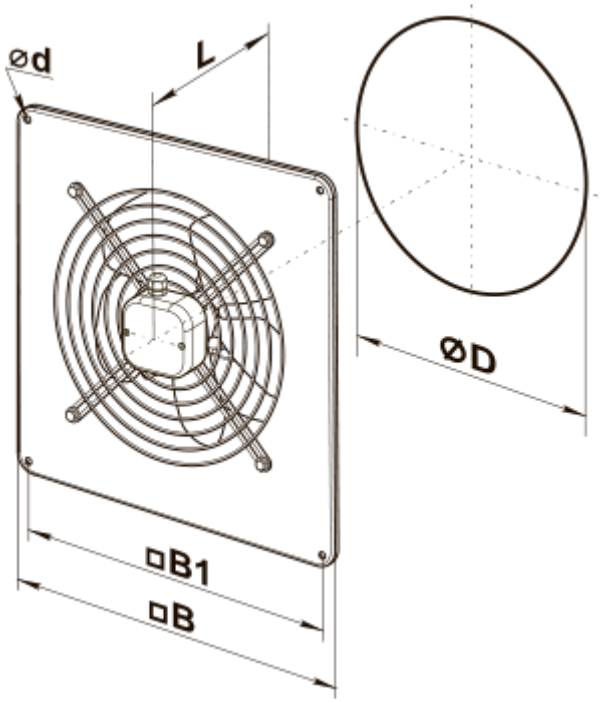
ød
L
ØD
□B1
□B

Ecodesign

Trademark	Vents
Model	OV 2E 250
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	92
Maximum external leakage rates (%)	2.7
Static efficiency (%)	16.8
Declared typology	NRVU UVU
Effective electric power input (kW)	0.082
Sound power level (dB(A))	80