
OV 4E 300




Wall-mounted axial fans

- Sound pressure level LpA at 3 m: 44
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	OV 4E 300	
Connected air duct size	mm	300	
Phases	-	1	
Maximum supply voltage	V	240	
Minimum supply voltage	V	220	
Power supply frequency	Hz	50	60
Rated power	W	75	
Unit current	A	0.35	
Maximum airflow	m³/h	1340	
Rotation speed at 50hz	-	1350	
Sound pressure level LpA at 3 m	dB(A)	44	
Weight	kg	5	
Transported air temperature (max)	°C	60	
Transported air temperature (min)	°C	-30	
Ingress protection rating	-	IP24	
Ingress protection rating of the drive	-	IP54	
Impeller material	-	Coated steel	

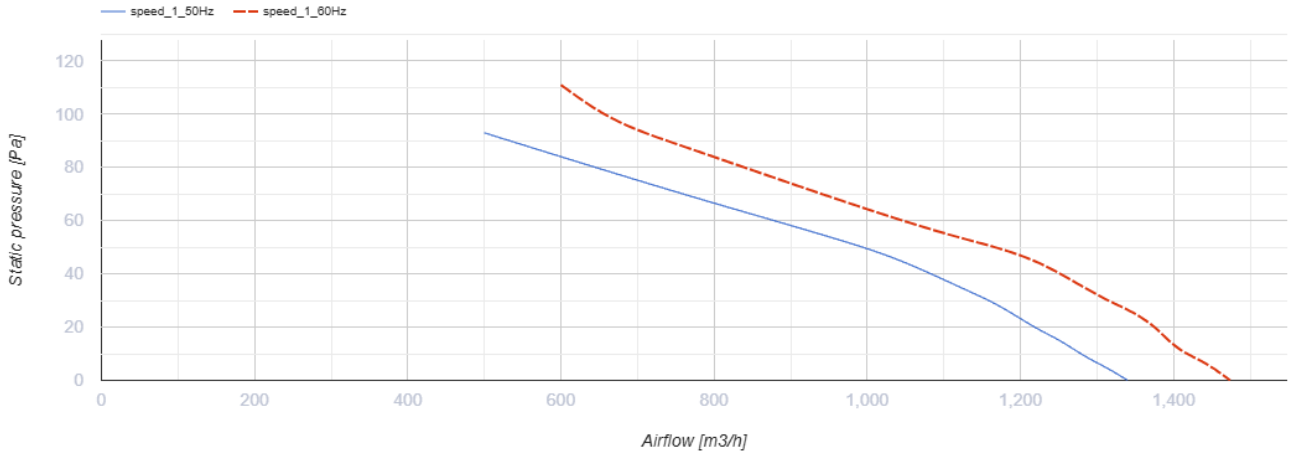

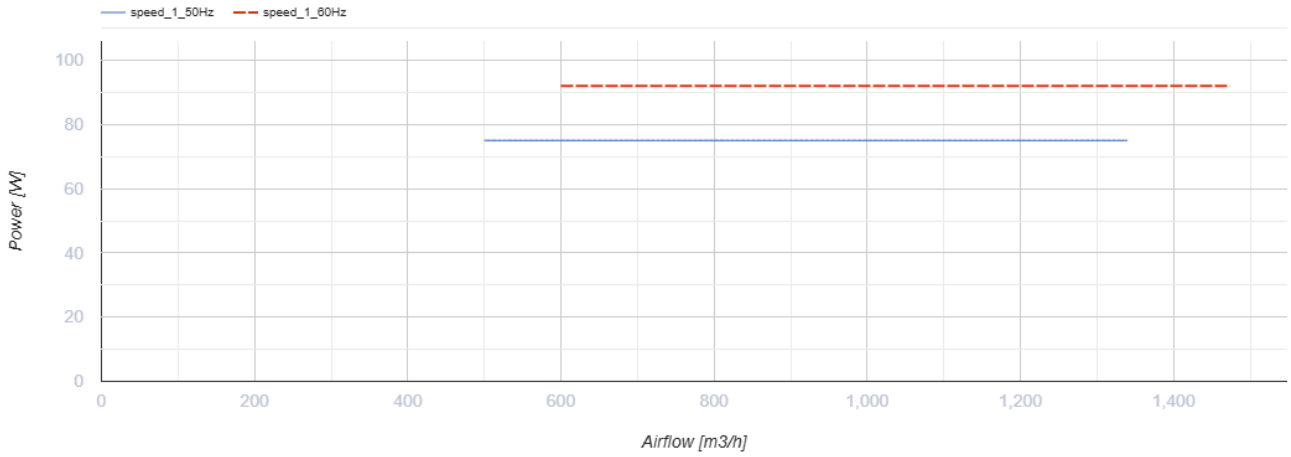

Dimensions

ØD	Ød	B	B1	L
317	9	430	380	145

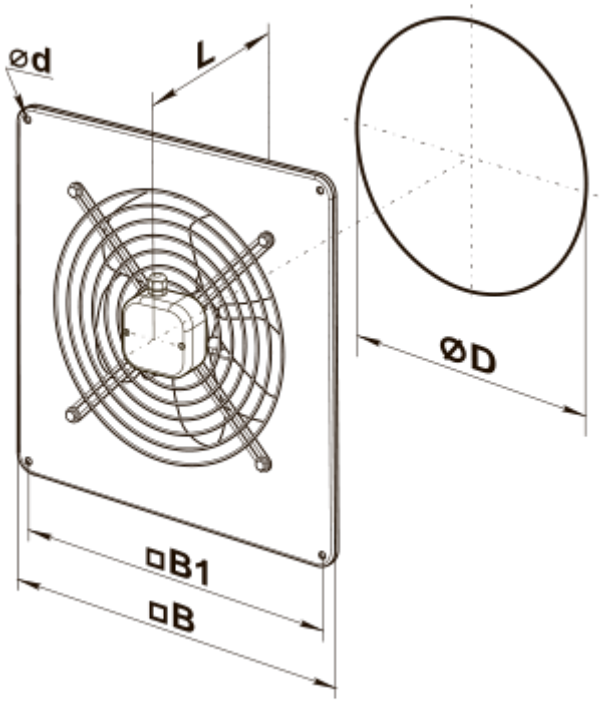
ød
L
ØD
□B1
□B

Ecodesign

Trademark	Vents
Model	OV 4E 300
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	79
Maximum external leakage rates (%)	2.7
Static efficiency (%)	15.7
Sound power level (dB(A))	78
Effective electric power input (kW)	0.095
Declared typology	NRVU UVU