
OV1 250

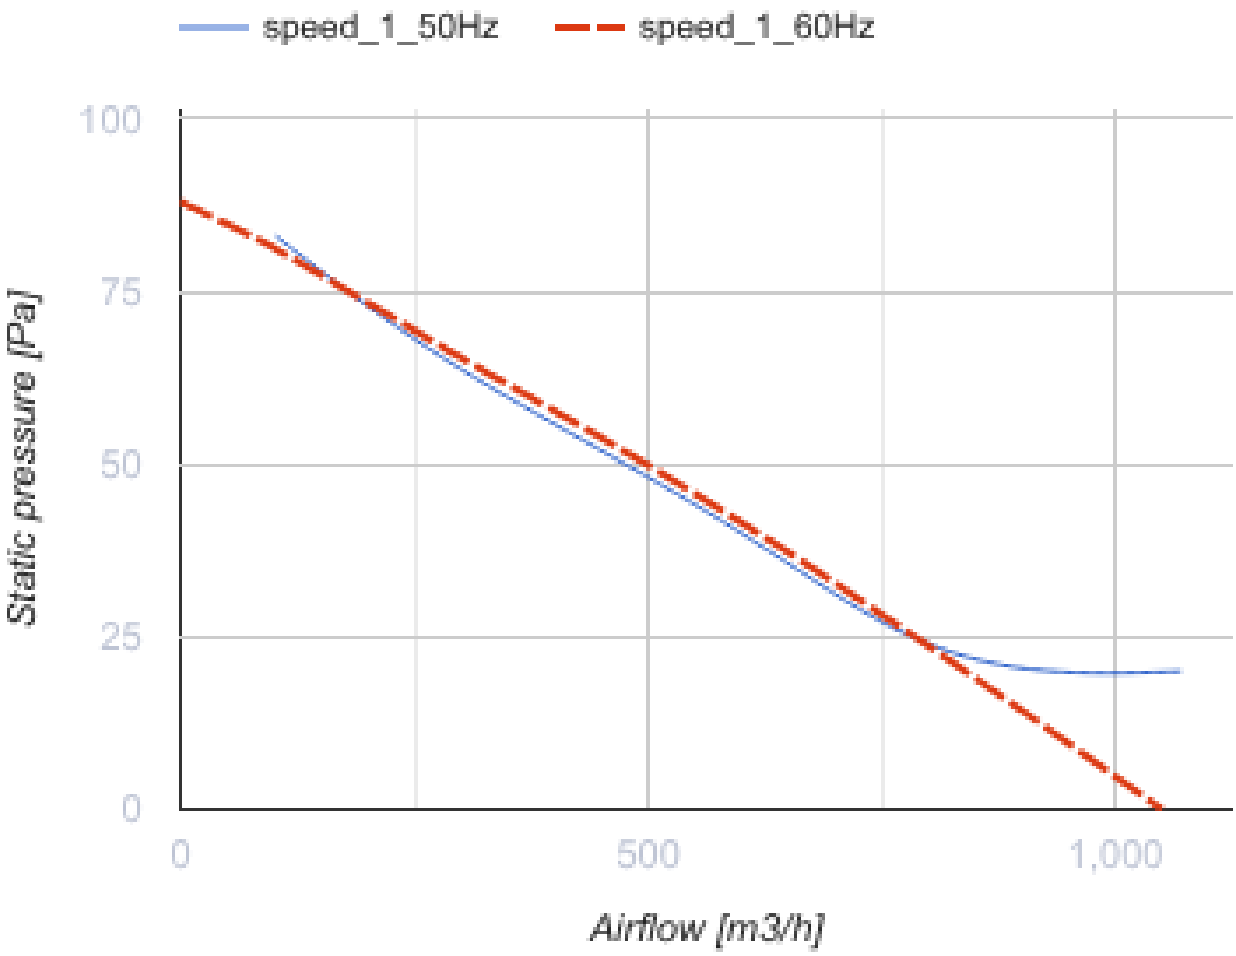


Wall-mounted axial fans aluminium impellers

- Sound pressure level LpA at 3 m: 37
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	OV1 250	
Connected air duct size	mm	250	
Phases	-	1	
Minimum supply voltage	V	220	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50	60
Rated power	W	68	
Unit current	A	0.48	
Maximum airflow	m^3/h	1070	
Rotation speed at 50hz	-	1300	
Sound pressure level LpA at 3 m	dB(A)	37	
Weight	kg	3.5	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-30	
Ingress protection rating	-	IP24	
Ingress protection rating of the drive	-	IP44	
Impeller material	-	Aluminium	


speed_1_50Hz
speed_1_60Hz
100
75
50
25
0
Static pressure [Pa]
0
500
1,000
Airflow [m3/h]

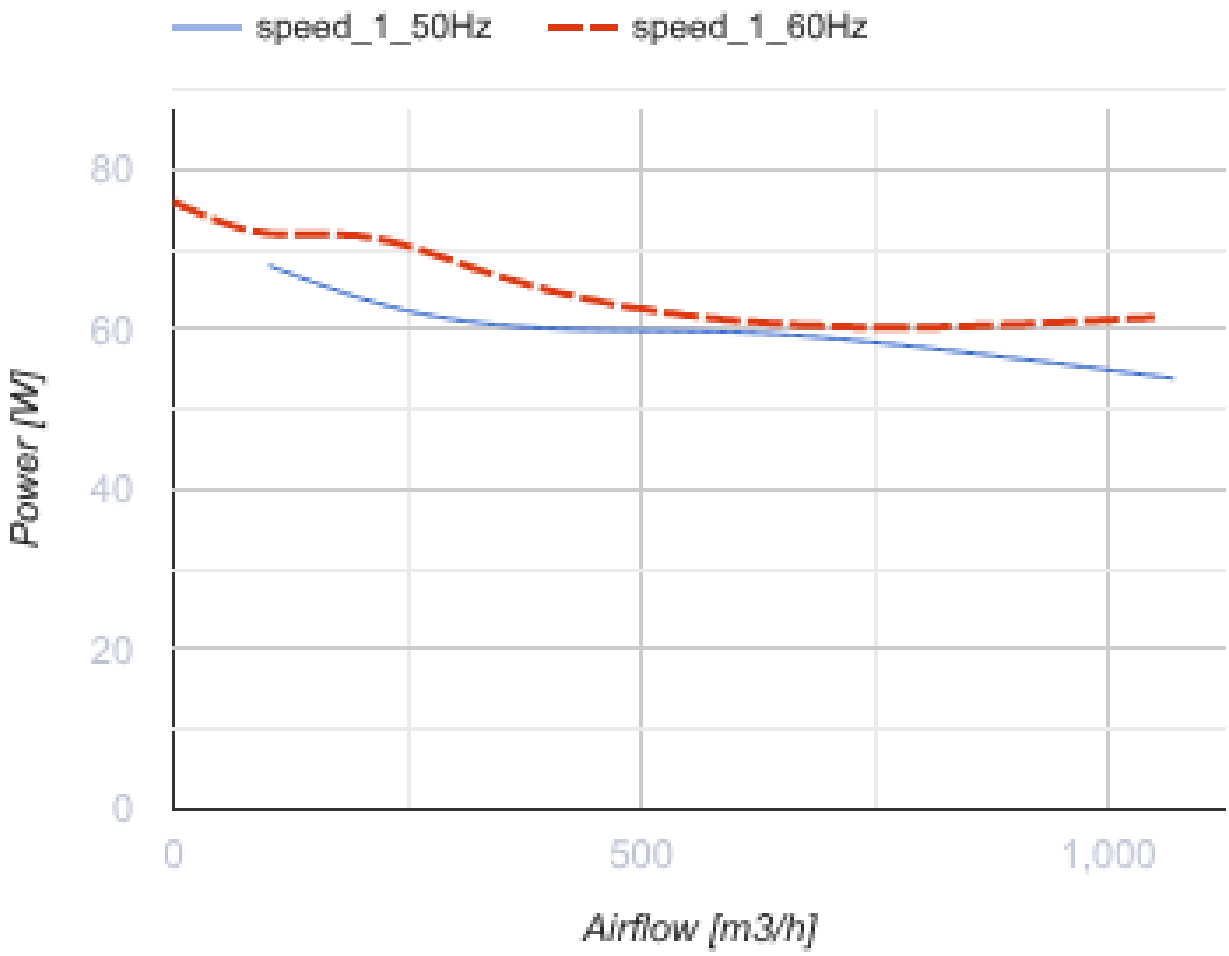

Dimensions

ØD	Ød	B	B1	L
262	7	370	320	140

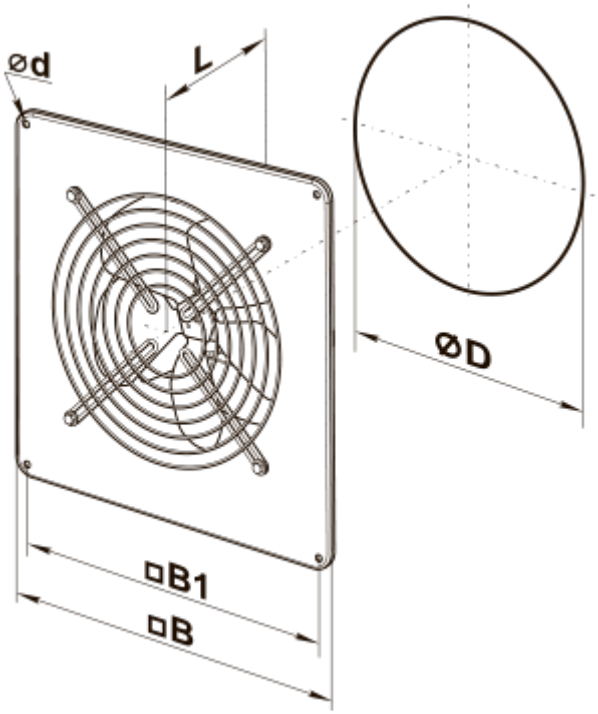
ød
L
ØD
□B1
□B

Ecodesign

Trademark	Vents					
Model	OV1 250					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-54	A+	-27	B	-12	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	900					
Electric power input (W)	68					
Reference flow rate (m³/s)	0.175					
Specific power input (SPI) (W/(m³/h))	0.078					
Control typology	Local demand control					
Sound power level (dB(A))	57					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	41		41		41	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5500		2800		1300	