
# OVK 4D 630 (220V/60Hz)

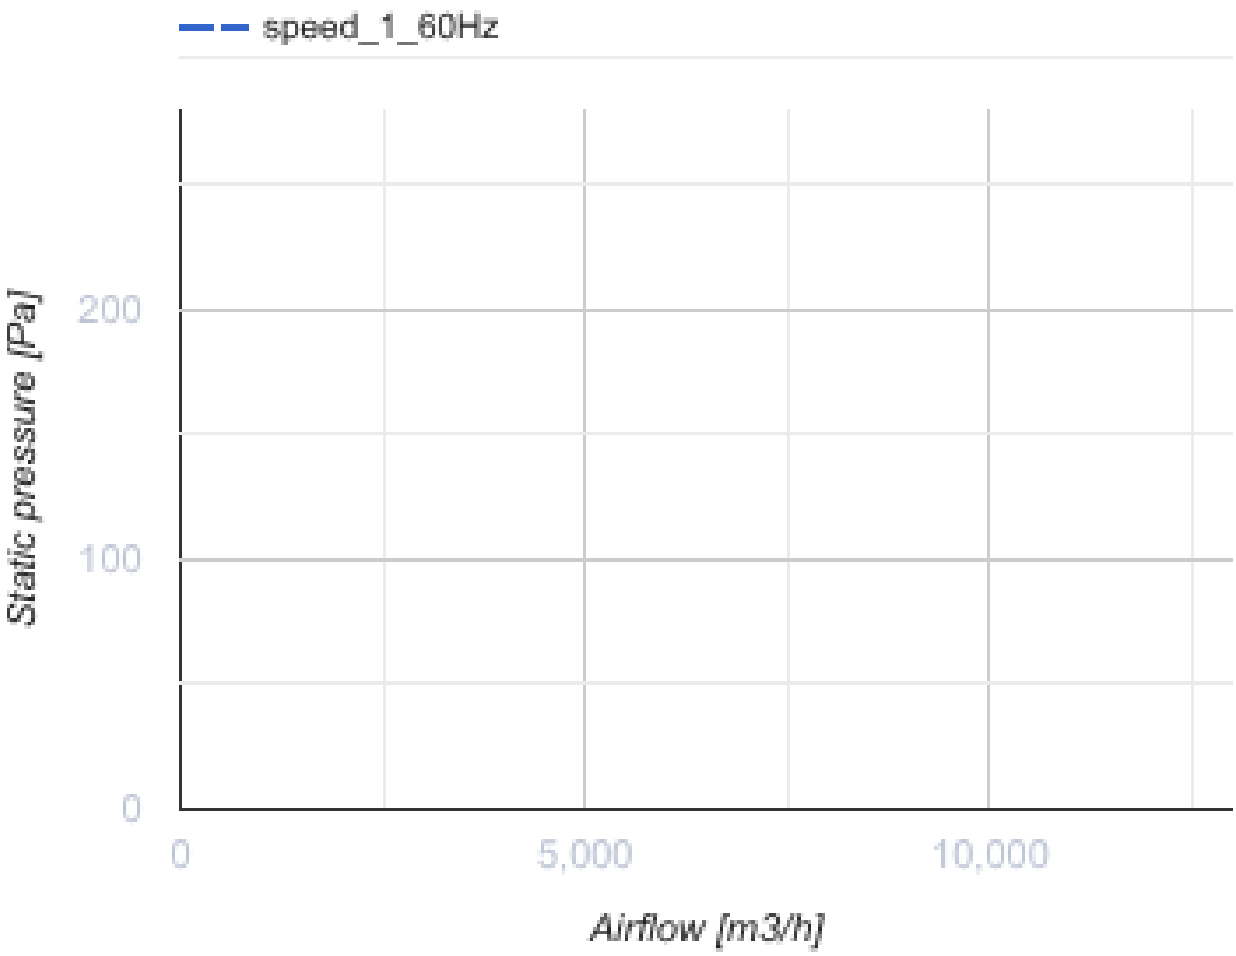



Wall-mounted axial fans

- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position

| | Unit of measurement | OVK 4D 630 (220V/60Hz) |
|---|---|---|
| Phases | - | 3 |
| Maximum supply voltage | V | 400 |
| Minimum supply voltage | V | 400 |
| Power supply frequency | Hz | 60 |
| Weight | kg | 20 |
| Transported air temperature (max) | °C | 50 |
| Transported air temperature (min) | °C | -30 |
| Ingress protection rating | - | IP24 |
| Ingress protection rating of the drive | - | IP54 |
| Impeller material | - | Coated steel |



speed_1_60Hz
Static pressure [Pa]
200
100
0
0
5,000
10,000
Airflow [m3/h]

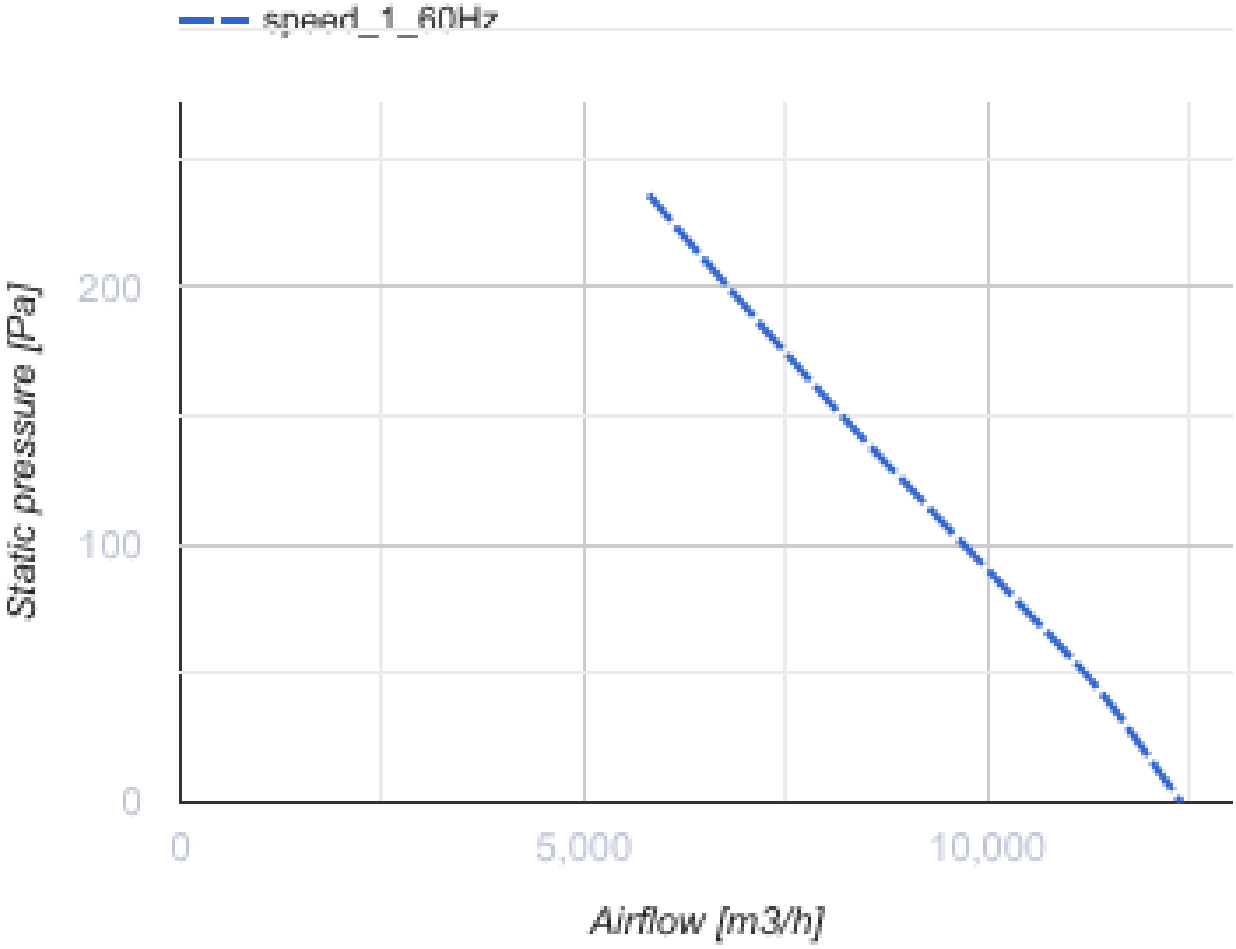
speed_1_60Hz
Static pressure [Pa]
200
100
0
0
5,000
10,000
Airflow [m3/h]

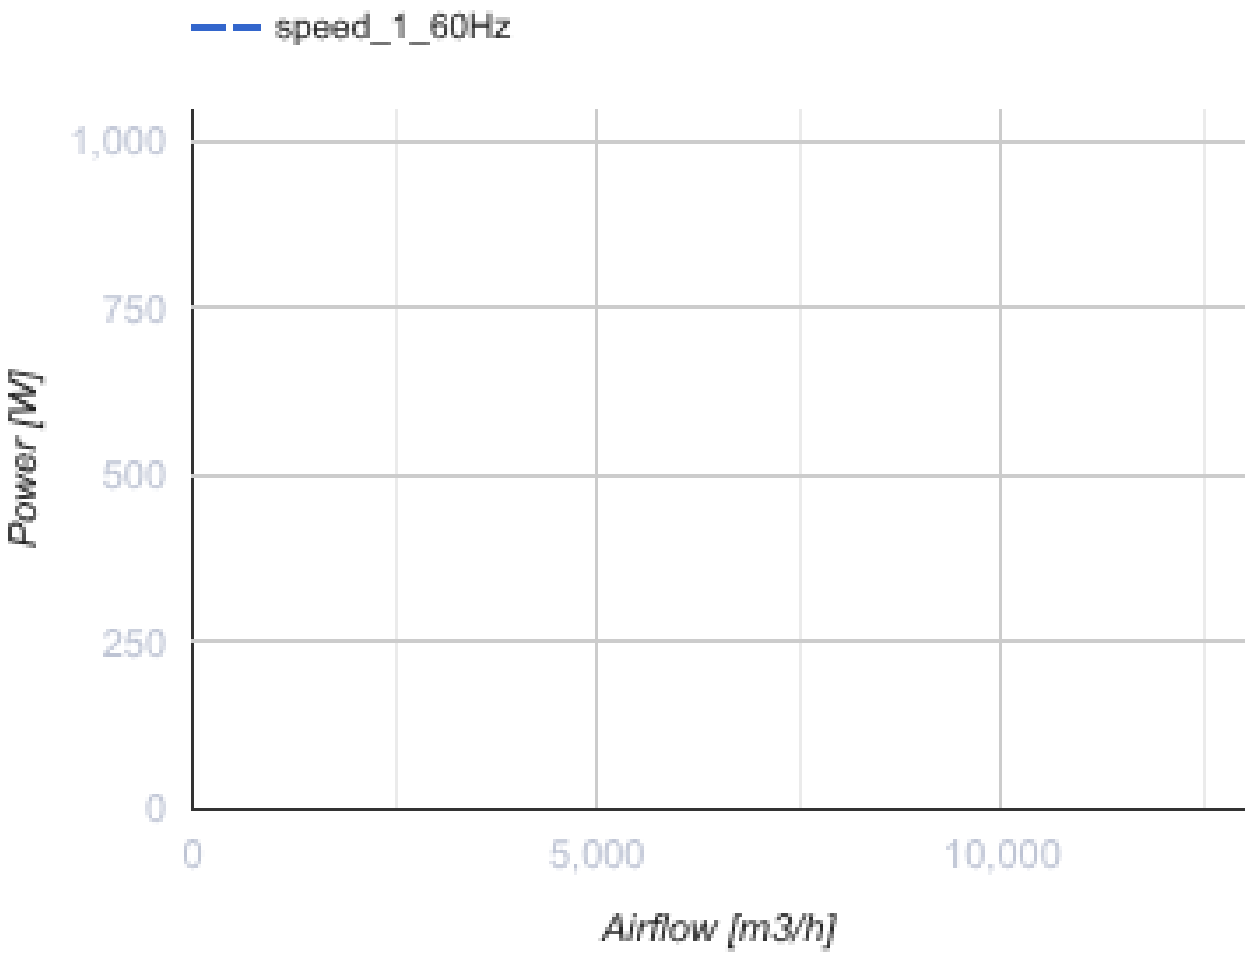


## Dimensions

| ØD | ØD1 | ØD2 | Ød | L |
|---|---|---|---|---|
| 650 | 760 | 800 | 11 | 275 |

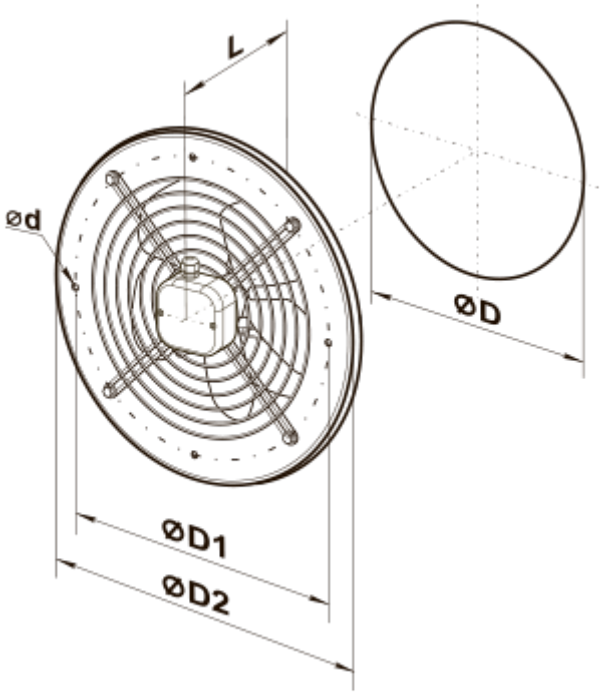
L
ØD
Ød
ØD1
ØD2

## Ecodesign

| Trademark | Vents |
|---|---|
| Model | OVK 4D 630 (220V/60Hz) |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal external pressure (Pa) | 152 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 41.2 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 0.81 |
| Sound power level (dB(A)) | 98 |