RSA5D-2,5-M



Three phase speed controller

• Casing material: Coated steel

	Unit of measurement	RSA5D-2,5-M
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Unit current	A	2.5
Ambient air temperature min	°C	-20
Ambient air temperature max	°C	35
Ingress protection rating	-	IP54

Dimensions

A	B	C	D	E
300	325	185	255	255

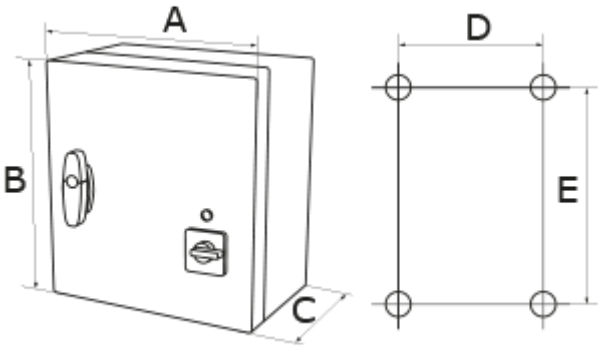
A
B
C
D
E