
VCUN 280x127-2,2-4 R90

Radial fans


• Sound pressure level LpA at 3 m: 75
• Impeller type: Centrifugal impeller with forward curved blades
• Casing material: Coated steel

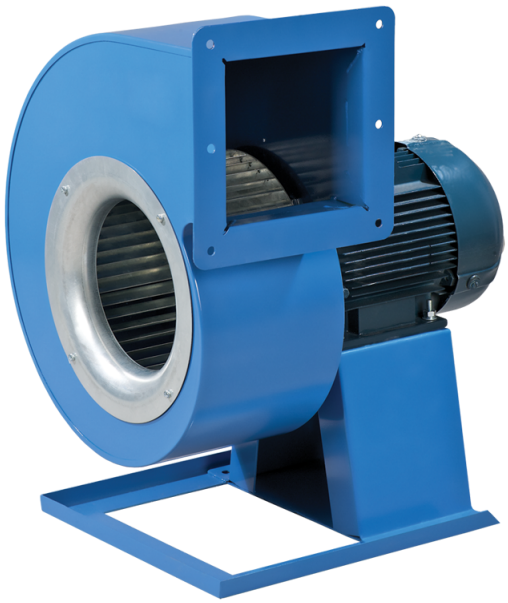

	Unit of measurement	VCUN 280x127-2,2-4 R90
Phases	-	3
Maximum supply voltage	V	400
Minimum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	2200
Unit current	A	5.1
Maximum airflow	m^3/h	4395
Rotation speed at 50hz	-	1420
Sound pressure level LpA at 3 m	dB(A)	75
Weight	kg	34.2
Transported air temperature (max)	°C	60
Ingress protection rating	-	IP54
Ingress protection rating of the drive	-	IP54
Impeller material	-	Galvanized steel

Dimensions

ØD	Ød	Ød1	B	H	H1	H2	H3	L	L1	L2	P	M	I	G	K	S
280	10	12	483	626	225	189	292	503	231	196	243	300	410	27	355	125

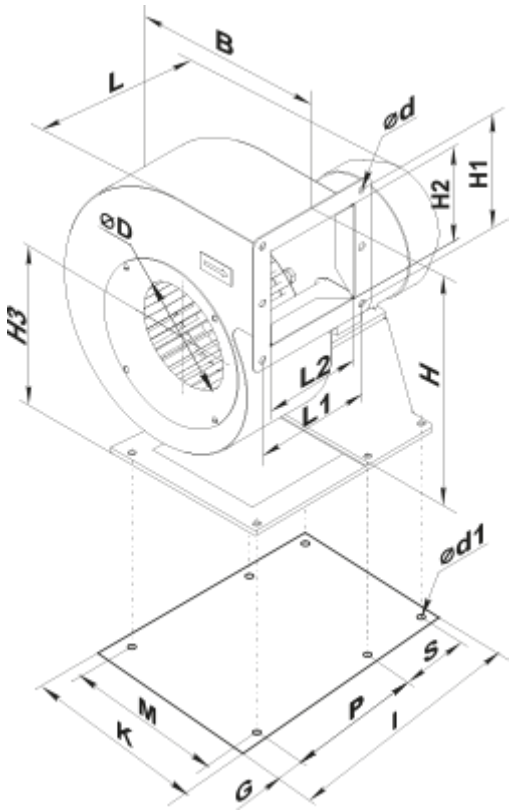

Accessories

Speed controllers

Name	Photo	Description
RSA5D-8,0-M		Three phase speed controller
RSA5D-11,0-M		Three phase speed controller
RSA5D-12,0-M		Three phase speed controller