
VKP 125 mini S

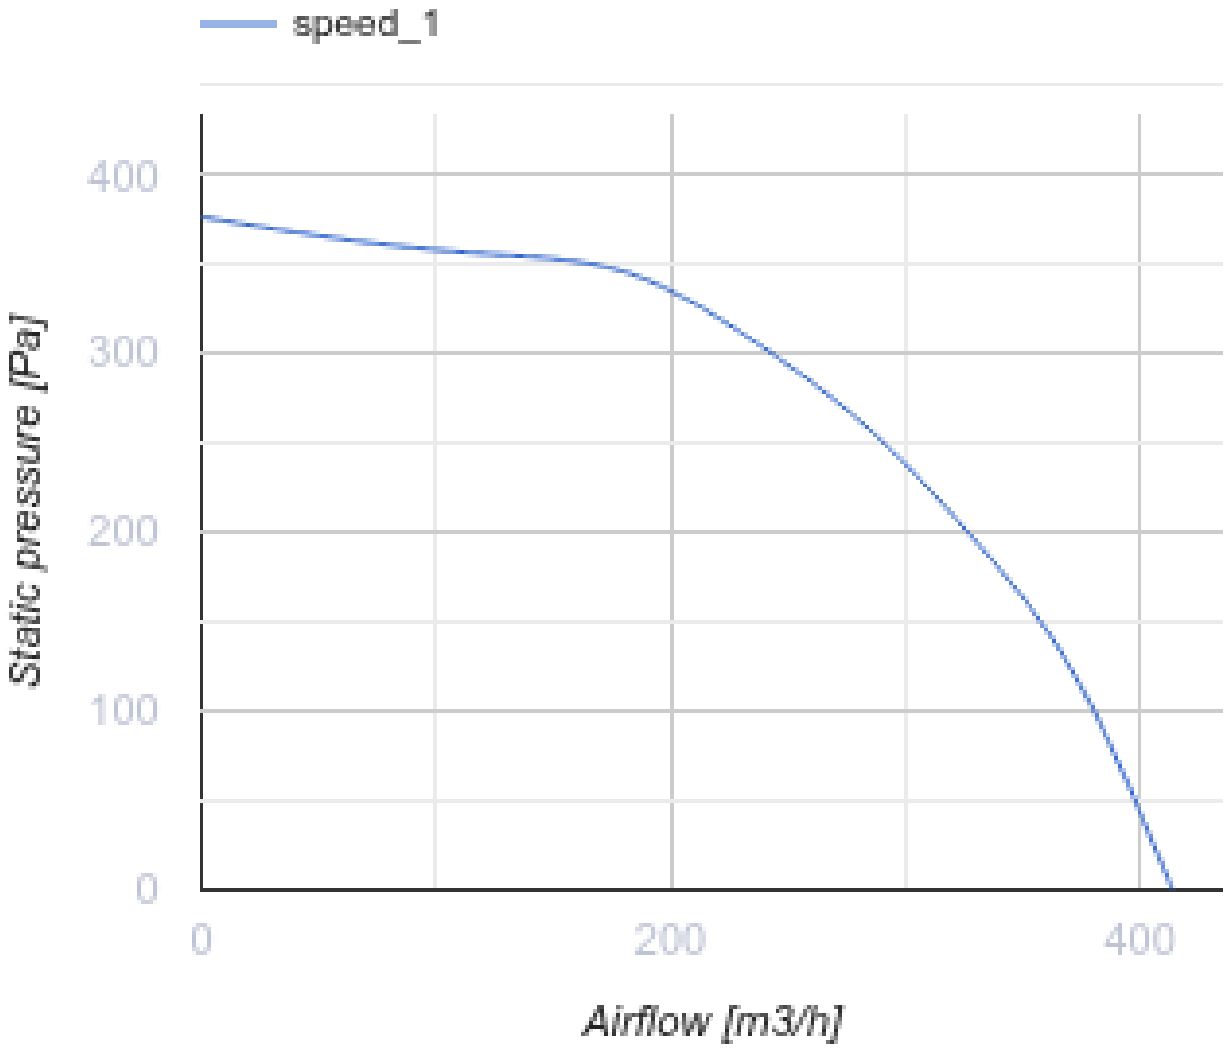


Centrifugal inline fans

• Sound pressure level LpA at 3 m: 47
• Impeller type: Centrifugal impeller with forward curved blades
• Casing material: Coated steel
• Installation in any position


	Unit of measurement	VKP 125 mini S
Connected air duct size	mm	125
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	127
Unit current	A	0.55
Maximum airflow	m³/h	414
Rotation speed at 50hz	-	2800
Sound pressure level LpA at 3 m	dB(A)	47
Weight	kg	5.8
Transported air temperature (max)	°C	50
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Plastic


speed_1
400
300
200
100
0
Static pressure [Pa]
0
200
400
Airflow [m3/h]

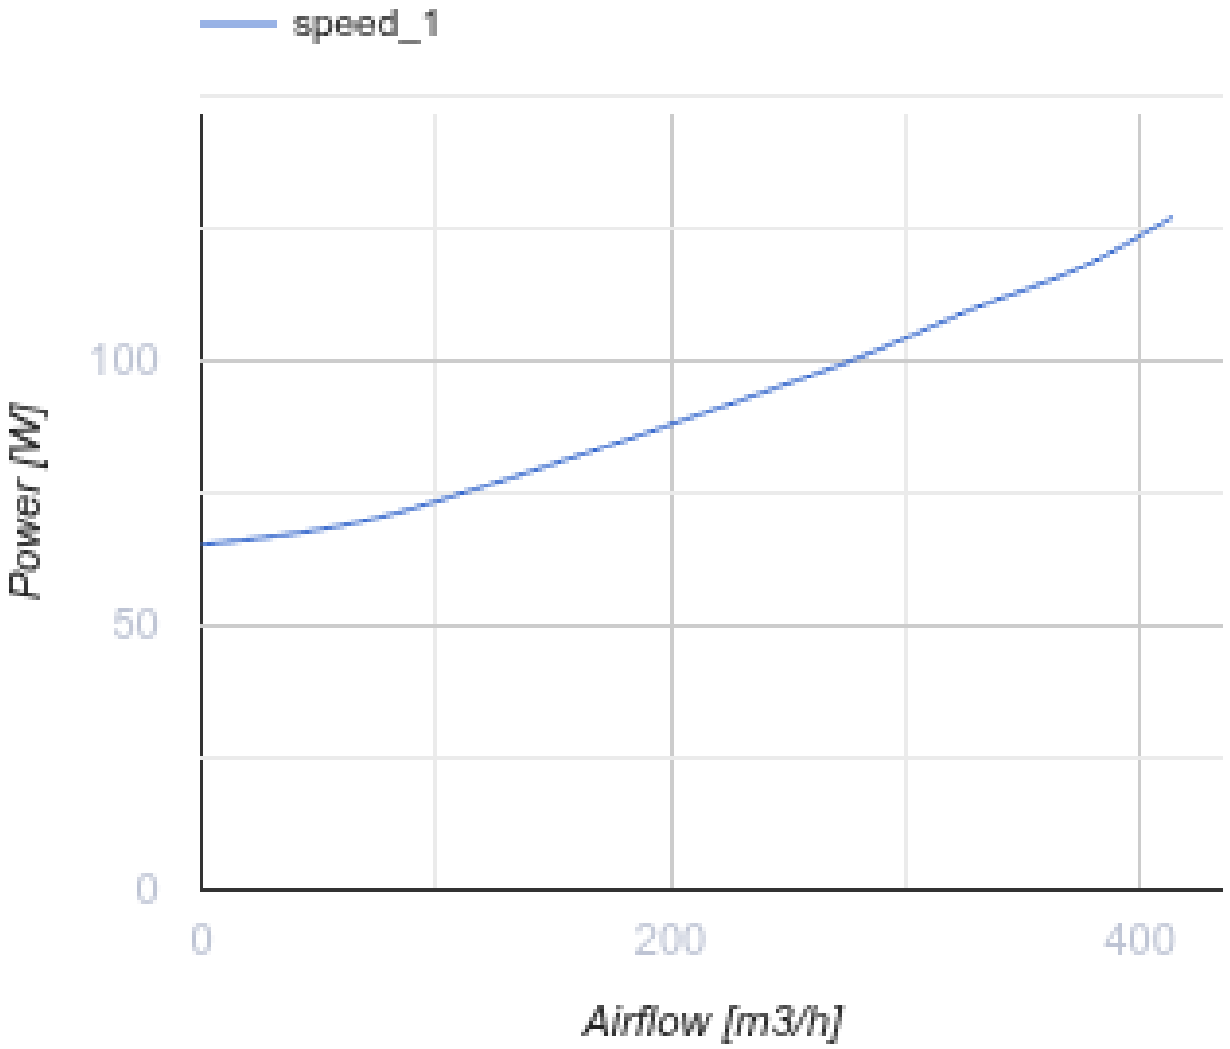


Dimensions

ØD	ØD1	B	H	L	L2
124	124	270	141	397	299

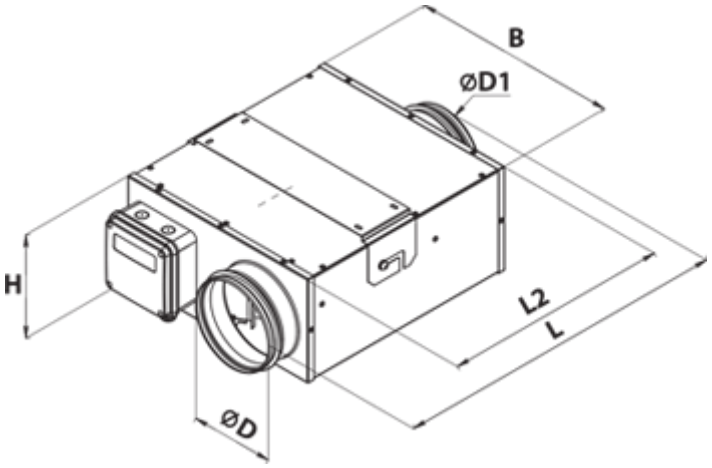
B
ØD1
H
L2
L
ØD

Ecodesign

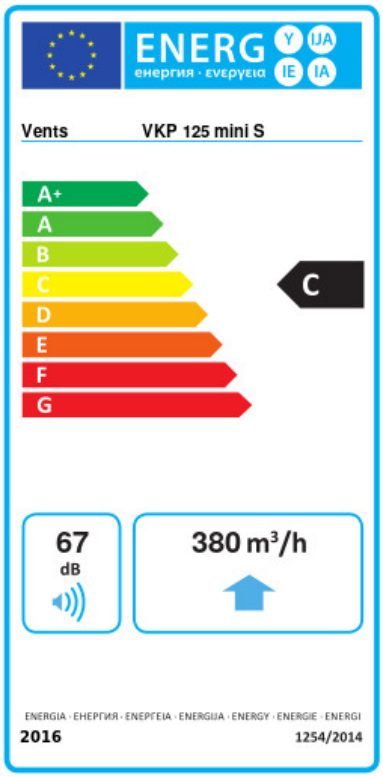

Trademark	Vents					
Model	VKP 125 mini S					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-50.5	A+	-23.5	C	-7.9	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	380					
Electric power input (W)	118					
Reference flow rate (m³/s)	0.074					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.367					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	67					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	194		194		194	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	