
VS 630-6D

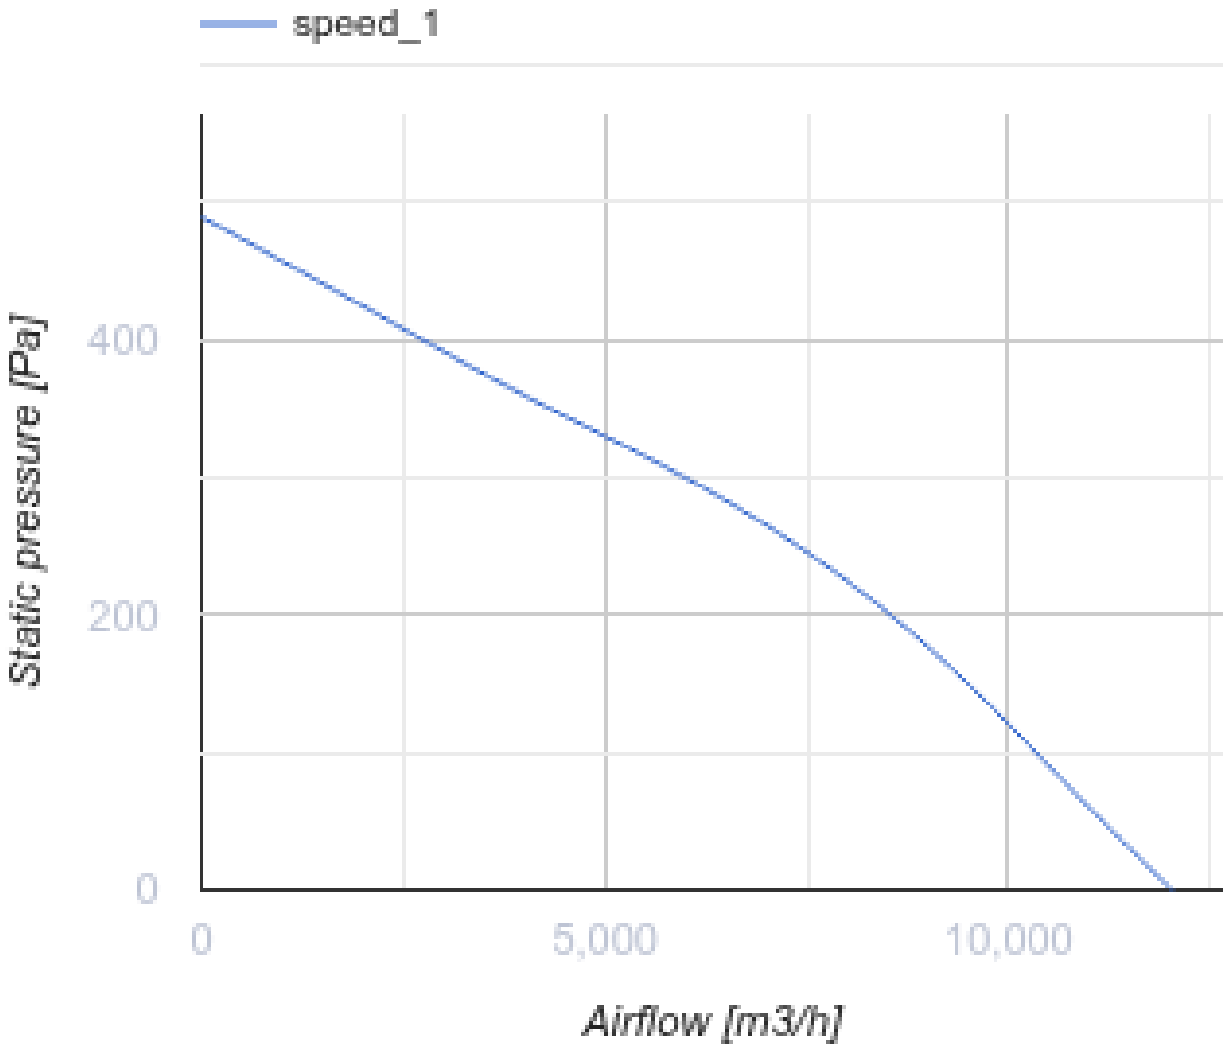


Centrifugal inline fans in sound-insulated casing

- Sound pressure level LpA at 3 m: 55
- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position


	Unit of measurement	VS 630-6D
Connected air duct size	mm	630
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1310
Unit current	A	2.8
Maximum airflow	m³/h	12030
Rotation speed at 50hz	-	880
Sound pressure level LpA at 3 m	dB(A)	55
Weight	kg	98
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-40
Ingress protection rating	-	IPX4
Impeller material	-	Aluminium


speed_1
Static pressure [Pa]
400
200
0
0
5,000
10,000
Airflow [m3/h]

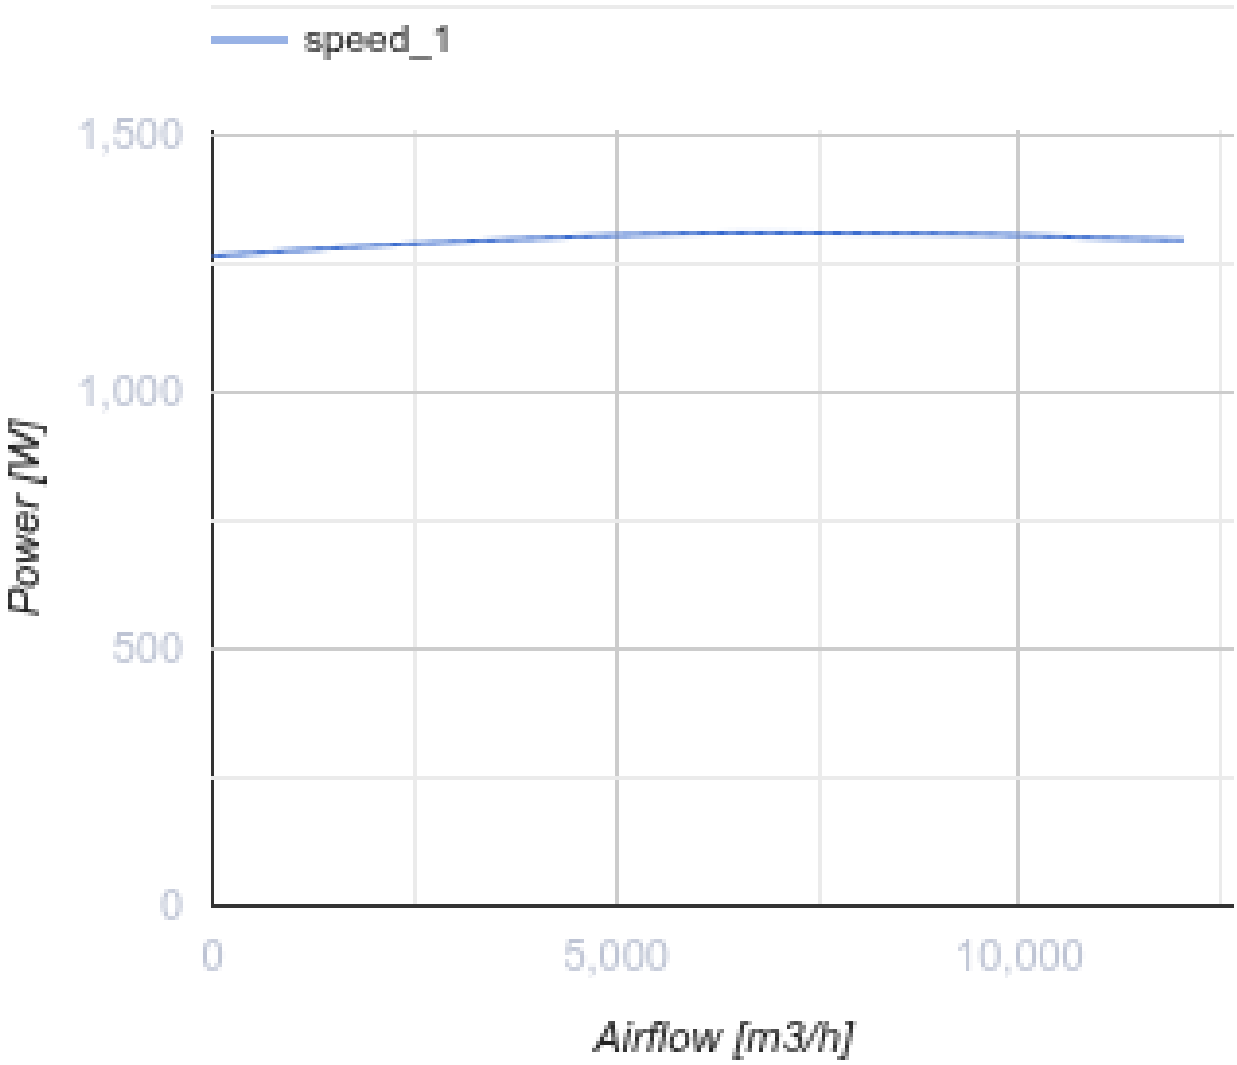

Dimensions

A
800

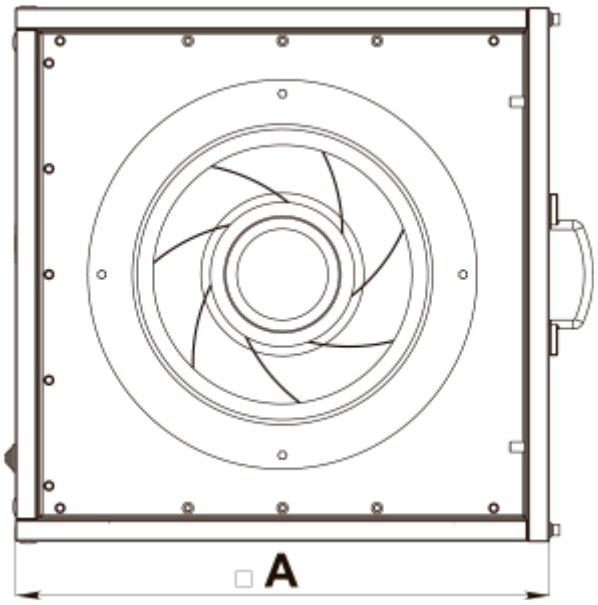
A

Ecodesign

Trademark	Vents
Model	VS 630-6D
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	270
Maximum external leakage rates (%)	2.7
Static efficiency (%)	40.5
Declared typology	NRVU UVU
Effective electric power input (kW)	1.309
Sound power level (dB(A))	75