
VS 630S-4D

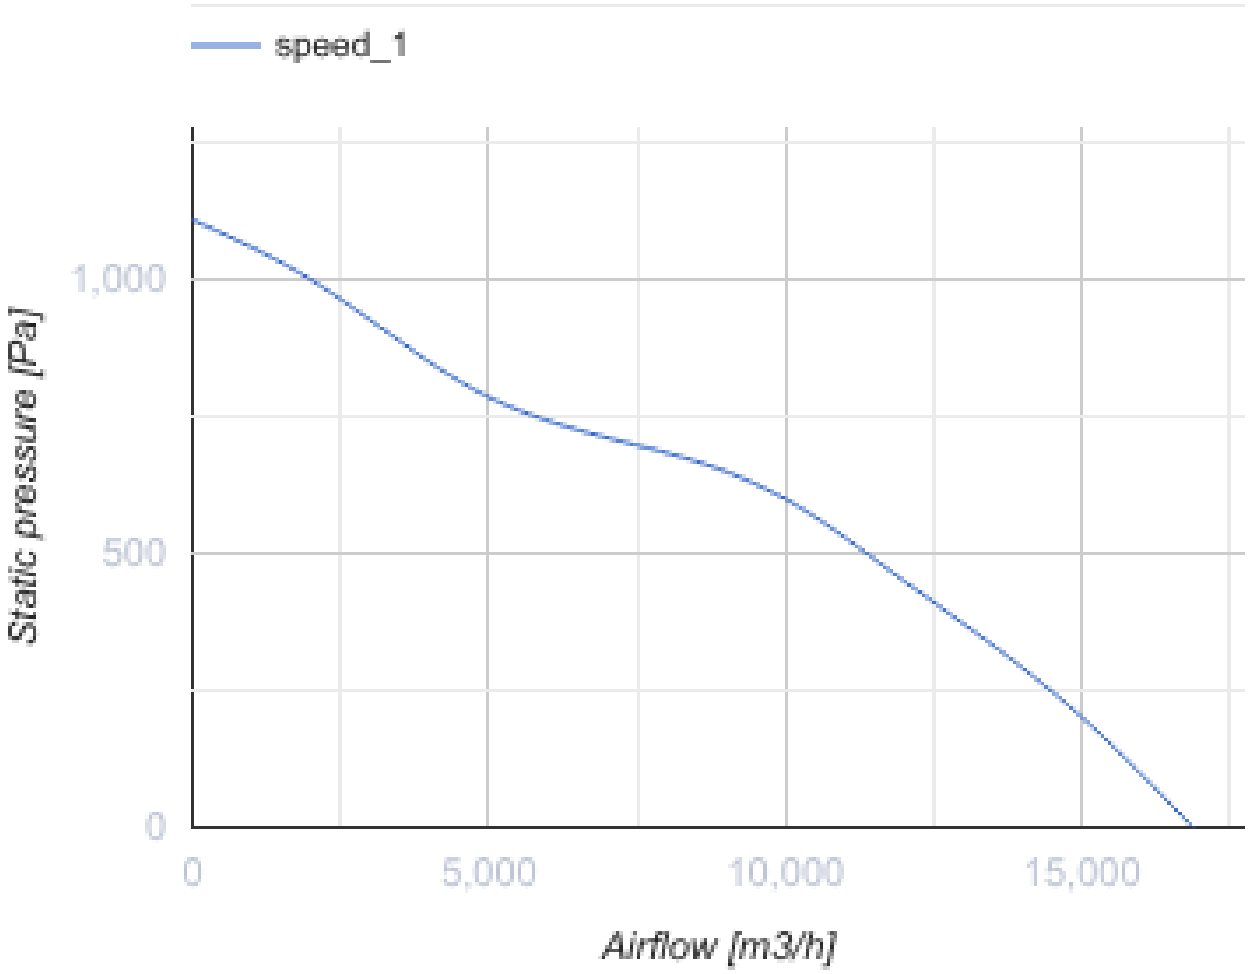


Centrifugal inline fans in sound-insulated casing

- Sound pressure level LpA at 3 m: 69
- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position


	Unit of measurement	VS 630S-4D
Connected air duct size	mm	630
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	4250
Unit current	A	7.55
Maximum airflow	m^3/h	16870
Rotation speed at 50hz	-	1300
Sound pressure level LpA at 3 m	dB(A)	69
Weight	kg	100
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-40
Ingress protection rating	-	IPX4
Impeller material	-	Aluminium


speed_1
Static pressure [Pa]
1,000
500
0
0
5,000
10,000
15,000
Airflow [m3/h]

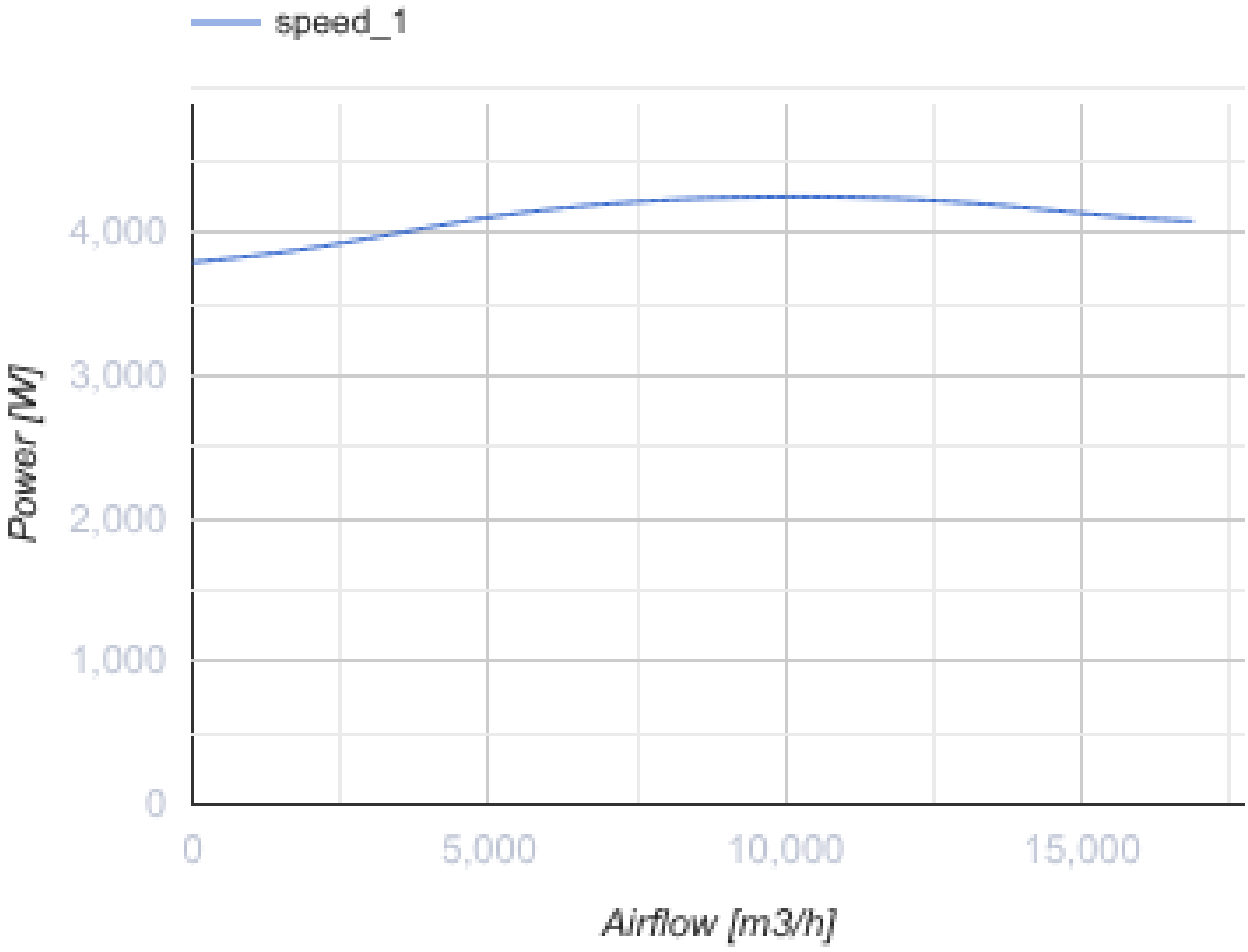

Dimensions

A
800

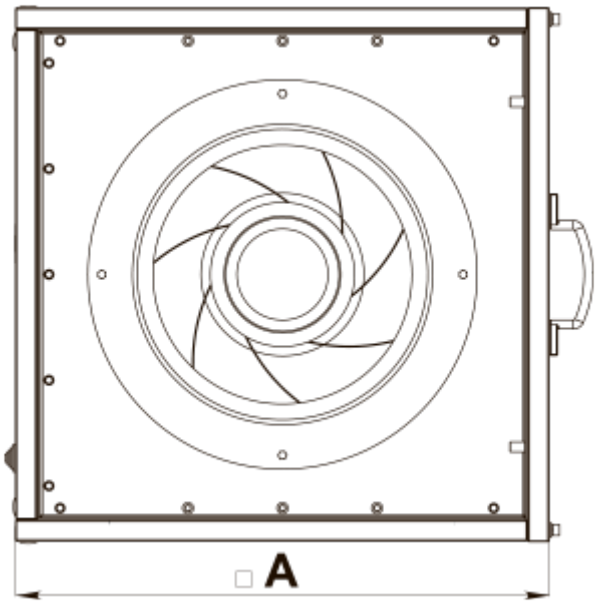
A