
OV 4E 450




Wall-mounted axial fans

- Sound pressure level LpA at 3 m: 56
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	OV 4E 450
Connected air duct size	mm	450
Phases	-	1
Maximum supply voltage	V	240
Minimum supply voltage	V	220
Power supply frequency	Hz	50
Rated power	W	250
Unit current	A	1.2
Maximum airflow	m^3/h	4680
Rotation speed at 50hz	-	1350
Sound pressure level LpA at 3 m	dB(A)	56
Weight	kg	10.5
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP54
Impeller material	-	Coated steel

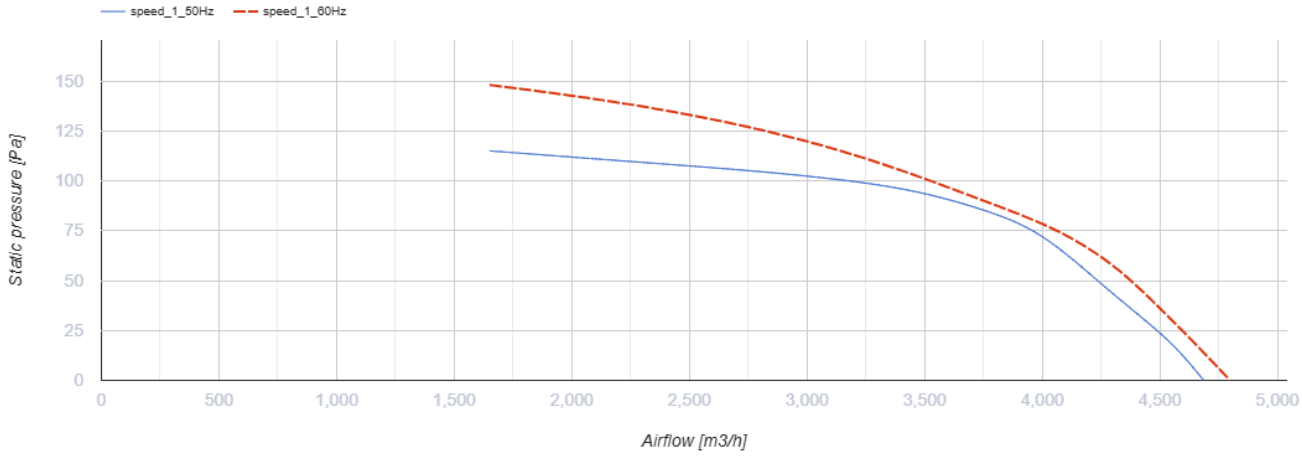

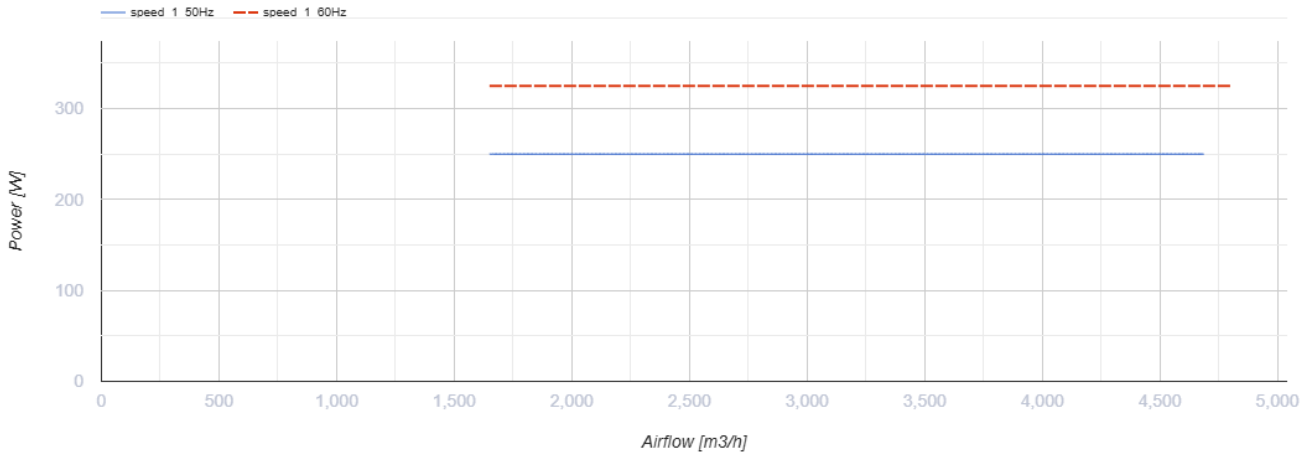

Dimensions

ØD	Ød	B	B1	L
465	11	576	535	230

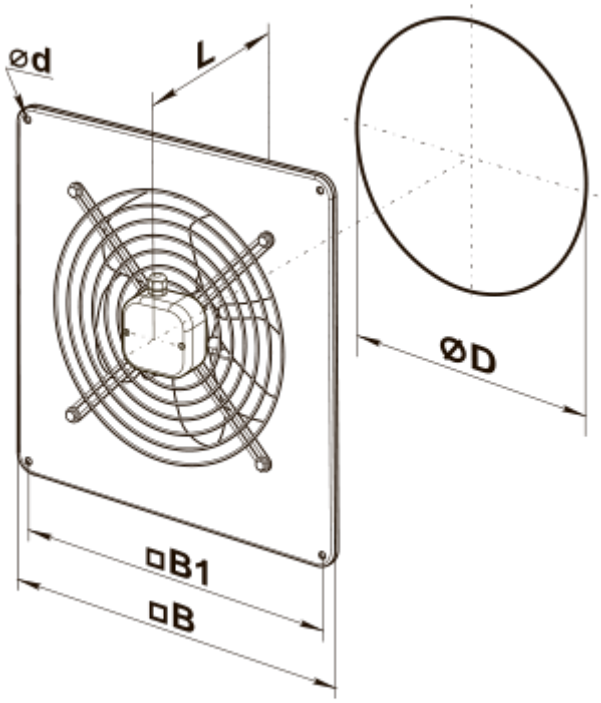
ød
L
ØD
□B1
□B

Ecodesign

Trademark	Vents
Model	OV 4E 450
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	90
Maximum external leakage rates (%)	2.7
Static efficiency (%)	32
Effective electric power input (kW)	0.288
Sound power level (dB(A))	84
Declared typology	NRVU UVU